

Ordering Information

This is only for reference.

For selecting the specific model, follow the Autonics web site.

AS 80 - 50 D ①

① Control output

N3: NPN Normally Open + Normally Closed



P3: PNP Normally Open + Normally Closed

Product Components


- Bracket × 1
- M5 Bolt × 4

Connections


■ Cable type

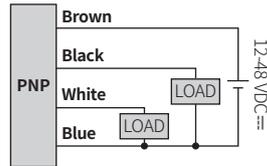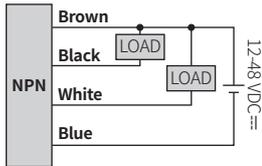

■ Inner circuit (NPN output)

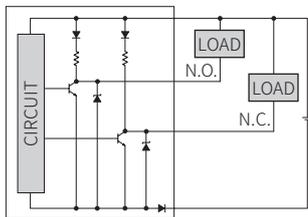

■ Inner circuit (PNP output)

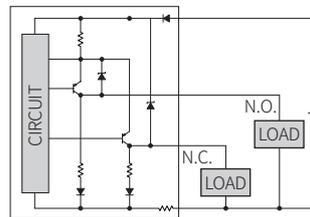


Specifications

Installation	Upper side type
Model	AS80-50D □
Sensing side length	80 mm
Sensing distance	50 mm
Setting distance	0 to 35 mm
Hysteresis	≤ 15 % of sensing distance
Standard sensing target: iron	150 × 150 × 1 mm
Response frequency⁰¹⁾	30 Hz
Affection by temperature	± 10 % for sensing distance at ambient temperature 20 °C
Indicator	Power indicator (green), operation indicator (yellow)
Approval	CE ENEC
Unit weight	≈ 470 g

01) The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

Power supply	12-48 VDC≐ (ripple P-P: ≤ 10 %), operating voltage: 10-65 VDC≐
Current consumption	≤ 20 mA
Control output	≤ 200 mA
Residual voltage	≤ 2 V
Protection circuit	Surge protection circuit, output short over current protection circuit, reverse polarity protection
Insulation type	≥ 50 MΩ (500 VDC≐ megger)
Dielectric strength	1,500 VAC ~ 50/60 Hz for 1 minute
Vibration	1 mm amplitude at frequency 10 to 55 Hz (for 1 min) in each X, Y, Z direction for 2 hours
Shock	500 m/s ² (≈ 50 G) in each X, Y, Z direction for 3 times
Ambient temperature	-25 to 70 °C, storage: -30 to 80 °C (non-freezing or non-condensation)
Ambient humidity	35 to 95 %RH, storage: 35 to 95 %RH (non-freezing or non-condensation)
Protection structure	IP67 (IEC standards)
Connection	Cable type model
Wire spec.	Ø 5 mm, 4-wire, 2 m
Connector spec.	AWG 22 (0.08 mm, 60-wire), insulator diameter: Ø 1.25 mm
Material	Case: PC+ABS, standard type cable (black): polyvinyl chloride (PVC)


Operation Timing Chart

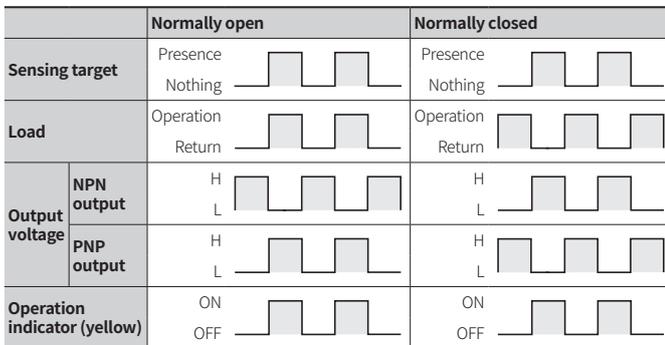



Dimensions

• Unit: mm, For the detailed dimensions of the product, follow the Autonics web site.

A Tap hole

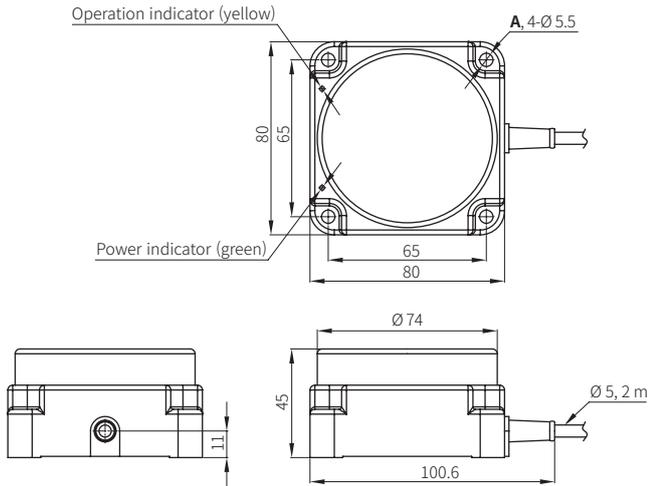

Sensing Distance Feature Data by Target Material and Size

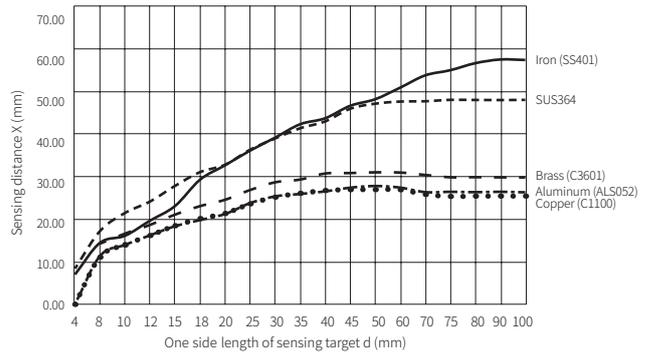


Setting Distance Formula

Detecting distance can be changed by the shape, size or material of the target.



For stable sensing, install the unit within the 70% of sensing distance.

Setting distance (Sa)

= Sensing distance (Sn) × 70%

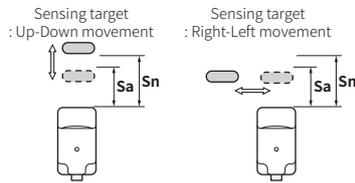

Sensing Distance Feature Data by Parallel (Left/Right) Movement

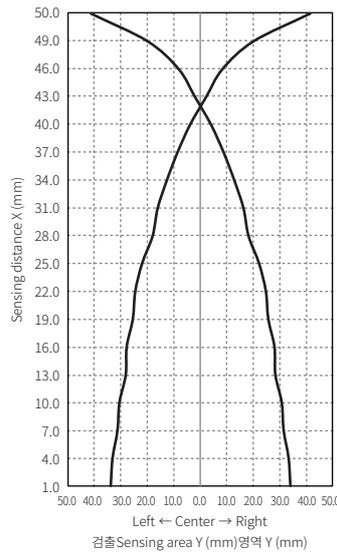

Mutual-interference & Influence by Surrounding Metals


■ Mutual-interference

When plural proximity sensors are mounted in a close row, malfunction of sensor may be caused due to mutual interference.


Therefore, be sure to provide a minimum distance between the two sensors, as below table.

A	320 mm	B	320 mm
----------	--------	----------	--------

[Face to Face]



[Parallel]



■ Differential frequency

When sensors are mounted on metallic panel, it must be prevented sensors from being affected by any metallic object except target. Therefore, be sure to provide a minimum distance as below chart.

d	150 mm	m	80 mm
----------	--------	----------	-------

