

Cylindrical Inductive Proximity Sensors



PR Series (DC 3-wire) PRODUCT MANUAL

For your safety, read and follow the considerations written in the instruction manual, other manuals and Autonics website.

The specifications, dimensions, etc. are subject to change without notice for product improvement. Some models may be discontinued without notice.

Features

- Excellent noise immunity with specialized sensor IC
- Built-in surge protection circuit, output short over current protection circuit, reverse polarity protection
- Simple operation, reliable performance, and high durability
- Cable connector type / Connector type: easy maintenance and wiring
- Operation indicator (red LED)
- IP67 protection structure (IEC standard)
- Durable and reliable alternative to micro switches and limit switches

Safety Considerations

- Observe all 'Safety Considerations' for safe and proper operation to avoid hazards.
- ⚠ symbol indicates caution due to special circumstances in which hazards may occur.

⚠ Warning Failure to follow instructions may result in serious injury or death.

- 01. Fail-safe device must be installed when using the unit with machinery that may cause serious injury or substantial economic loss. (e.g. nuclear power control, medical equipment, ships, vehicles, railways, aircraft, combustion apparatus, safety equipment, crime/disaster prevention devices, etc.)**
Failure to follow this instruction may result in personal injury, economic loss or fire.
- 02. Do not use the unit in the place where flammable/explosive/corrosive gas, high humidity, direct sunlight, radiant heat, vibration, impact, or salinity may be present.**
Failure to follow this instruction may result in explosion or fire.
- 03. Do not disassemble or modify the unit.**
Failure to follow this instruction may result in fire.
- 04. Do not connect, repair, or inspect the unit while connected to a power source.**
Failure to follow this instruction may result in fire.
- 05. Check 'Connections' before wiring.**
Failure to follow this instruction may result in fire.

⚠ Caution Failure to follow instructions may result in injury or product damage.

- 01. Use the unit within the rated specifications.**
Failure to follow this instruction may result in fire or product damage.
- 02. Use a dry cloth to clean the unit, and do not use water or organic solvent.**
Failure to follow this instruction may result in fire.

Cautions during Use

- Follow instructions in 'Cautions during Use'.
- Otherwise, it may cause unexpected accidents.
- 12-24 VDC \equiv power supply should be insulated and limited voltage/current or Class 2, SELV power supply device.
- Use the product, after 0.8 sec of supplying power.
- Wire as short as possible and keep away from high voltage lines or power lines, to prevent surge and inductive noise.
- Do not use near the equipment which generates strong magnetic force or high frequency noise (transceiver, etc.).
- In case installing the product near the equipment which generates strong surge (motor, welding machine, etc.), use diode or varistor to remove surge.
- This unit may be used in the following environments.
 - Indoors (in the environment condition rated in 'Specifications')
 - Altitude max. 2,000 m
 - Pollution Degree 2
 - Installation Category II

Cautions for Installation

- Install the unit correctly with the usage environment, location, and the designated specifications.
- Do NOT impacts with a hard object or excessive bending of the wire lead-out. It may cause damage the water resistance.
- Do NOT pull the \varnothing 3.5 mm cable with a tensile strength of 25 N, the \varnothing 4 mm cable with a tensile strength of 30 N or over and the \varnothing 5 mm cable with a tensile strength of 50 N or over. It may result in fire due to the broken wire.
- When extending wire, use AWG 22 cable or over within 200 m.

Ordering Information

This is only for reference.

For selecting the specific model, follow the Autonics web site.

PR ① ② ③ - ④ **D** ⑤ - ⑥

① Connection

No-mark: Cable type
W: Cable connector type
CM: Connector type

② Body size

No-mark: Standard
S: Short body
L: Long body

③ DIA. of sensing side

08: Ø 8 mm
12: Ø 12 mm
18: Ø 18 mm
30: Ø 30 mm

④ Sensing distance

Number: Sensing distance (unit: mm)

⑤ Control output


N: NPN Normally Open
N2: NPN Normally Closed
P: PNP Normally Open
P2: PNP Normally Closed

⑥ Standard/Cable material

No-mark: Standard type
V: Oil resistant cable type


Connections

■ Cable type

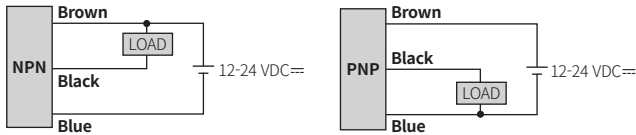


■ Cable connector type / Connector type

- For LOAD connection, follow the cable type connection.
- Fasten the connector not to show the thread. (0.39 to 0.49 N m)
- Fasten the vibration part with PTFE tape.




Pin	Color	Function
①	Brown	+V
②	-	-
③	Blue	0 V
④	Black	OUT

■ Control Output Circuit (NPN output)

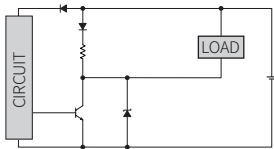

■ Control Output Circuit (PNP output)

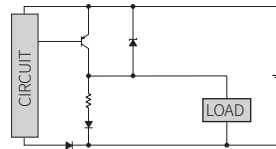

Operation Timing Chart

		Normally Open	Normally Closed
Sensing target	Presence		
	Nothing		
Load	Operation		
	Return		
Output voltage	NPN output		
	PNP output		
Operation indicator (red)	ON		
	OFF		

Sold Separately

- Connector cable, Spatter protection cover
- Connector connection cable, Fixing bracket
- Transmission coupler

Specifications

Installation	Flush type			
	Model	PR□08-1.5D □	PR□12-2D □	PR□18-5D □
DIA. of sensing side	Ø 8 mm	Ø 12 mm	Ø 18 mm	Ø 30 mm
Sensing distance	1.5 mm	2 mm	5 mm	10 mm
Setting distance	0 to 1.05 mm	0 to 1.4 mm	0 to 3.5 mm	0 to 7 mm
Hysteresis	≤ 10 % of sensing distance (DIA. of sensing side Ø 8 mm connector model: ≤ 15 %)			
Standard sensing target: iron	8 × 8 × 1 mm	12 × 12 × 1 mm	18 × 18 × 1 mm	30 × 30 × 1 mm
Response frequency ⁰¹⁾	1.5 kHz	1.5 kHz	500 Hz	400 Hz
Affection by temperature	≤ ± 10 % for sensing distance at ambient temperature 20 °C (DIA. of sensing side Ø 8 mm: ≤ ± 20 %)			
Indicator	Operating indicator (red)			
Approval	CE EAC	CE EAC	CE EAC	CE EAC

Installation	Non-Flush type			
	Model	PR□08-2D □	PR□12-4D □	PR□18-8D □
DIA. of sensing side	Ø 8 mm	Ø 12 mm	Ø 18 mm	Ø 30 mm
Sensing distance	2 mm	4 mm	8 mm	15 mm
Setting distance	0 to 1.4 mm	0 to 2.8 mm	0 to 5.6 mm	0 to 10.5 mm
Hysteresis	≤ 10 % of sensing distance (DIA. of sensing side Ø 8 mm connector model: ≤ 15 %)			
Standard sensing target: iron	8 × 8 × 1 mm	12 × 12 × 1 mm	25 × 25 × 1 mm	45 × 45 × 1 mm
Response frequency ⁰¹⁾	1.0 kHz	500 Hz	350 Hz	200 Hz
Affection by temperature	≤ ± 10 % for sensing distance at ambient temperature 20 °C (DIA. of sensing side Ø 8 mm: ≤ ± 20 %)			
Indicator	Operating indicator (red)			
Approval	CE EAC	CE EAC	CE EAC	CE EAC

01) The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.


Unit weight (package)		Ø 8 mm	Ø 12 mm	Ø 18 mm	Ø 30 mm
Cable type	Standard	≈ 52 g (≈ 64 g)	≈ 72 g (≈ 84 g)	≈ 110 g (≈ 122 g)	≈ 170 g (≈ 207 g)
	Short body	-	≈ 70 g (≈ 82 g)	-	-
	Long body	≈ 54 g (≈ 66 g)	≈ 76 g (≈ 88 g)	≈ 130 g (≈ 142 g)	≈ 210 g (≈ 247 g)
Cable connector type	Standard	≈ 32 g (≈ 44 g)	≈ 42 g (≈ 54 g)	≈ 58 g (≈ 70 g)	≈ 122 g (≈ 134 g)
	Long body	≈ 34 g (≈ 46 g)	-	≈ 78 g (≈ 90 g)	≈ 158 g (≈ 195 g)
Connector type	Standard	≈ 10 g (≈ 32 g)	≈ 26 g (≈ 38 g)	≈ 49 g (≈ 61 g)	≈ 134 g (≈ 146 g)
	Long body	-	-	≈ 73 g (≈ 85 g)	≈ 169 g (≈ 181 g)

Power supply	12-24 VDC≐ (operating voltage: 10-30 VDC≐)
Current consumption	≤ 10 mA
Control output	≤ 200 mA
Residual voltage	DIA. of sensing side Ø 8 mm: ≤ 2.0 V DIA. of sensing side Ø 12 mm, Ø 18 mm, Ø 30 mm: ≤ 1.5 V
Protection circuit	Surge protection circuit, output short over current protection circuit, reverse polarity protection
Insulation resistance	≥ 50 MΩ (500 VDC≐ megger)
Dielectric strength	1,500 VAC~ 50/60Hz for 1 minute (between all terminals and case)
Vibration	1 mm amplitude at frequency 10 to 55 Hz in each of X, Y, Z directions for 2 hours
Shock	500 m/s ² (≈ 50 G) X, Y, Z directions for 3 times
Ambient temp.	-25 to 70 °C, storage: -30 to 80 °C (non-freezing or non-condensation)
Ambient humi.	35 to 95 %RH, storage: 35 to 95 %RH (non-freezing or non-condensation)
Protection	IP67 (IEC standards)
Connection	Cable type / Cable connector type / Connector type model
Cable spec. ⁰¹⁾	DIA. of sensing side Ø 8 mm: Ø 3.5 mm, 2-wire DIA. of sensing side Ø 12 mm: Ø 4 mm, 2-wire DIA. of sensing side Ø 18 mm, Ø 30 mm: Ø 5 mm, 2-wire
Wire spec.	Ø 3.5 mm cable : AWG 24 (0.08 mm), 40-wire, insulator diameter: Ø 1 mm Ø 4 mm, Ø 5 mm cable : AWG 22 (0.08 mm), 60-wire, insulator diameter: Ø 1.25 mm
Connector	M12 connector
Material	Case/Nut: Nikel plated Brass, (connector case of DIA. of sensing side Ø 8 mm: SUS303), washer: Nikel plated Iron, sensing side: PBT, standard cable (black): polyvinyl chloride (PVC), oil resistant cable (gray): oil resistant polyvinyl chloride (PVC)

01) Cable type: 2 m, cable connector type: 300 mm

Cut-out Dimensions

Unit: mm, For the detailed drawings, follow the Autonics web site.




	Ø 8 mm	Ø 12 mm	Ø 18 mm	Ø 30 mm
Ø A	15	21	29	42
B	13	17	24	35

Setting Distance Formula

Detecting distance can be changed by the shape, size or material of the target. For stable sensing, install the unit within the 70% of sensing distance.

Setting distance (Sa)
= Sensing distance (Sn) × 70%

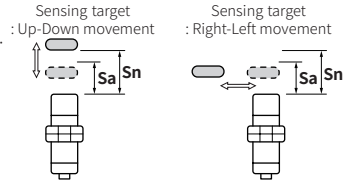


Mutual-interference & Influence by Surrounding Metals

Mutual-interference


When plural proximity sensors are mounted in a close row, malfunction of sensor may be caused due to mutual interference.

Therefore, be sure to provide a minimum distance between the two sensors, as below table.

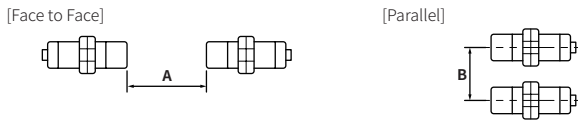

Influence by surrounding metals

When sensors are mounted on metallic panel, it must be prevented sensors from being affected by any metallic object except target. Therefore, be sure to provide a minimum distance as below chart.

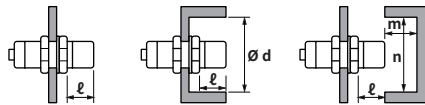


(unit: mm)

Sensing side Item	Ø 8 mm		Ø 12 mm		Ø 18 mm		Ø 30 mm	
	Flush	Non-flush	Flush	Non-flush	Flush	Non-flush	Flush	Non-flush
A	9	12	12	24	30	48	60	90
B	16	24	24	36	36	54	60	90
ℓ	0	8	0	11	0	14	0	15
Ø d	8	24	12	36	18	54	30	90
m	4.5	6	6	12	15	24	30	45
n	12	24	18	36	27	54	45	90

Tightening Torque


Use the provided washer to tighten the nuts.

The tightening torque of the nut varies with the distance from the fore-end. [Figure 1] If the nut tip is located at the front of the product, apply the front tightening torque. the allowable tightening torque table is for inserting the washer as [Figure 2].

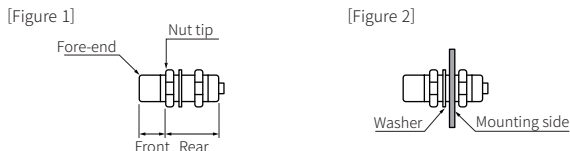


Sensing side Strength	Ø 8 mm		Ø 12 mm		Ø 18 mm		Ø 30 mm	
	Flush	Non-flush	Flush	Non-flush	Flush	Non-flush	Flush	Non-flush
Front size	7 mm	5 mm	13 mm	7 mm	-	-	26 mm	12 mm
Front torque	3.92 N m		6.37 N m		14.7 N m		49 N m	
Rear torque	8.82 N m		11.76 N m		14.7 N m		78.4 N m	

Sensing Distance Feature Data by Target Material and Size




Flush type


• Ø 8 mm

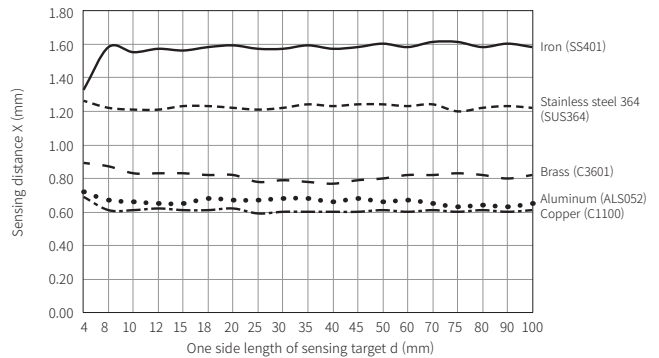


• Ø 12 mm

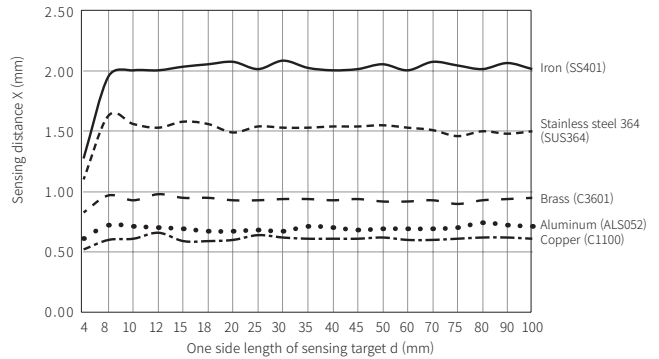


• Ø 18 mm

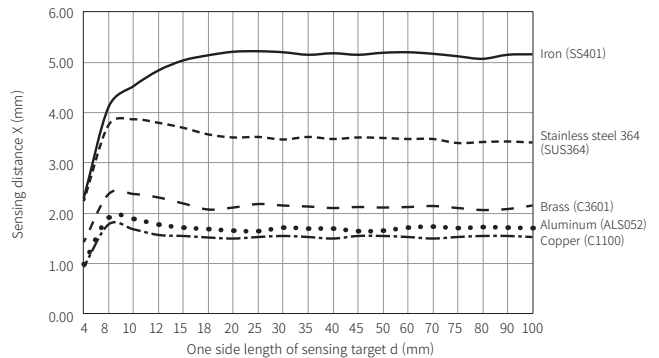

• Ø 30 mm

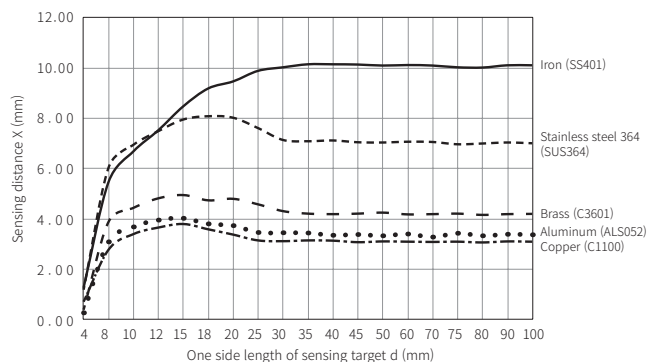


Sensing Distance Feature Data by Target Material and Size




■ Non-flush type


• Ø 8 mm

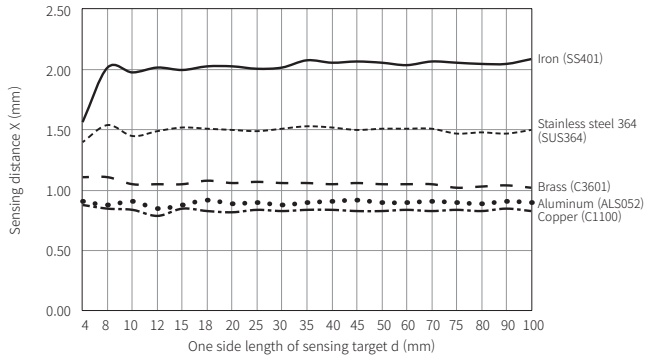


• Ø 12 mm

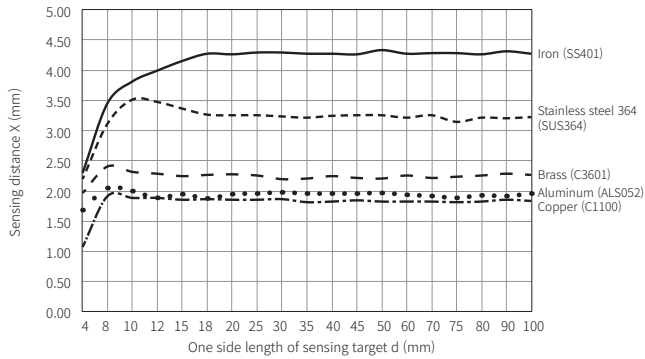


• Ø 18 mm

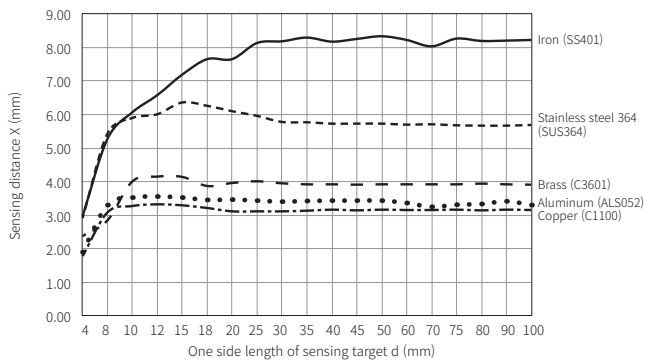

• Ø 30 mm

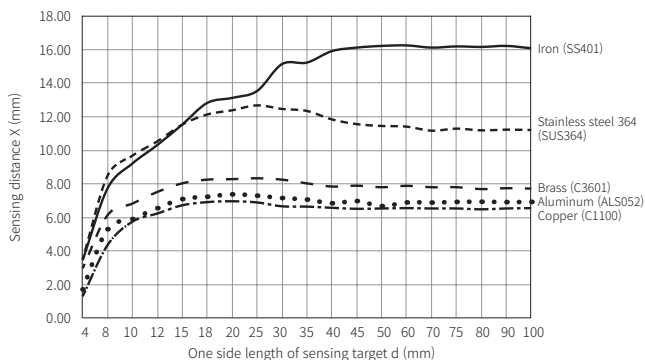


Sensing Distance Feature Data by Parallel (Left/Right) Movement




—	Flush type
- - -	Non-flush type


• Ø 8 mm

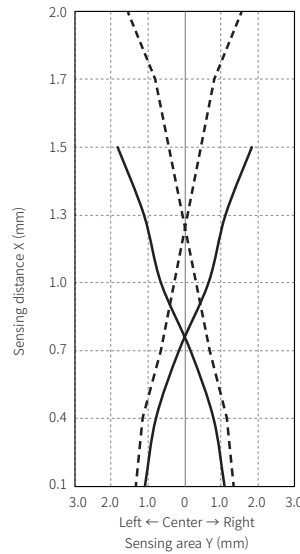

• Ø 12 mm

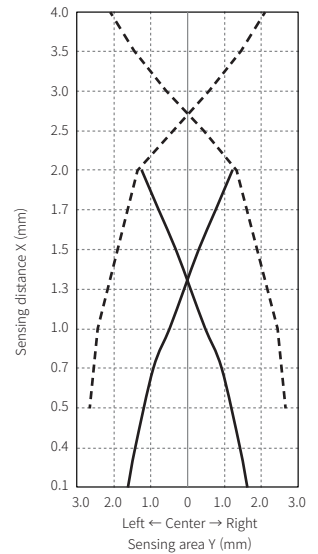

• Ø 18 mm

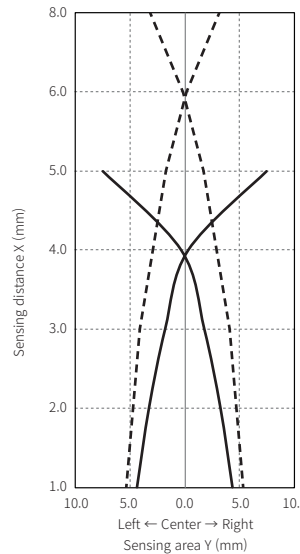

• Ø 30 mm

