

# Valva refulare

## VR



### Detalii constructive. Utilizare.

Valva refulare cu debit reglabil (parte centrala concava ajustabila), prevazuta cu rama de montaj.

Refulare / introducere, uzual pentru spatii de mici dimensiuni (grupuri sanitare, spatii de depozitare, arhive etc.).

### Material.

Aluminiu / otel.

### Finisaj.

Finisaj standard: alb RAL9016.

Finisaje optionale:

- diverse nuante RAL (cost suplimentar)

### Montaj. Fixare.

Montaj pe plafon (in interior).

Fixare cu ajutorul ramei de montaj (inclusa).


**Cod comanda:** VR aaa

Cod produs

diametru racord Ød (mm)

nespecificat - alb RAL9016 (standard)  
RALxxxx - cod RAL (cost suplimentar)

### Date tehnice

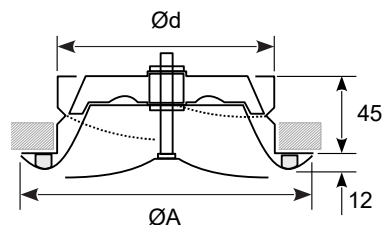


### Dimensiuni

Ød	ØA	Q (m <sup>3</sup> /h) @ Vef 3 (m/s)
100	137	90
125	164	150
160	212	200
200	248	250

Nu sunt disponibile alte dimensiuni.

### Montaj.



Fixare rama.

Montaj corp valva  
prin insurubare.

# Valva refulare

# VR

## Date tehnice

