

Transfer grille

TR-GALV



Specifications

Transfer grille for metallic doors, with fixed nonvision blades (form Λ).
Composed from a grille and a counterframe, for both sides of the doors.

For metallic doors with thickness between **50 ~ 65 mm**.

Used for air transfer between two rooms.

Material

Galvanised steel - DX51D Z140

Mounting / Fixing

Mounting in doors.
Fixing with visible screws (countersunk hole in frame).


Order code: **TR-GALV** **aaa x bbb**

Product code

opening length L (mm)


opening height H (mm)

Technical data

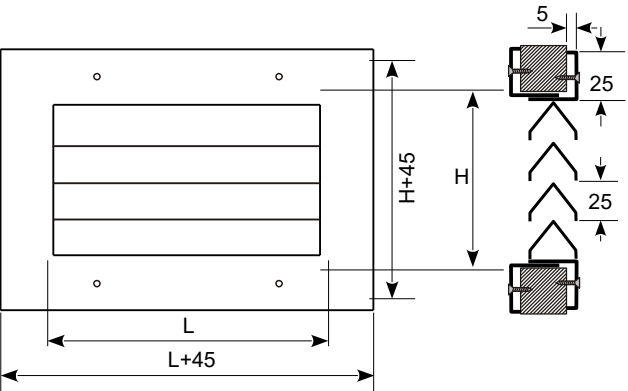


LxH - opening hole size

Door thickness (minimum ~ maximum)



min. 50 mm



max. 65 mm

Standard sizes

LxH	Q (m ³ /h) @ Vef 1,25 (m/s)	Q (m ³ /h) @ Vef 2,5 (m/s)
300x100	70	145
400x100	95	190
500x100	120	245
600x100	150	300
300x150	115	225
400x150	150	300
500x150	175	350
600x150	255	515
400x200	195	390
500x200	250	500
600x200	305	610
500x300	390	775
600x300	415	830
600x400	695	1390

Custom sizes

Custom sizes available (under certain commercial conditions),
between:
opening length L: 300~800 mm
opening height H: 100~600 mm
with a hight step of 50 mm.