

Access door

UV



Specifications

Access door with mini-latch opening system.

Used for protection of ventilation openings in buildings.

Material

Aluminium frame.
Steel door panel.

Finish

Standard finish: white RAL9003.

Optional finishing:
- different RAL (extra cost)

Mounting / Fixing

Mounting on ceiling / wall (inside).
Fixing with visible screws (countersunk hole in frame).

Fixing without visible screws can be made from the frame lateral size or with industrial contact adhesives**.

Optional accessories


Key lock - **K** (extra cost)
Magnetic lock - **M** (without extra cost)

Order code: **UV** **aaa x bbb** **+***

Product code	UV	aaa x bbb		
opening length L (mm)				
opening height H (mm)				
not specified - white RAL9003 (standard)				
RALxxxx - optional RAL code				
not specified - visible screw fixing (standard)				
FG - without holes in frame				

* optional accessories
** not supplied

Technical data

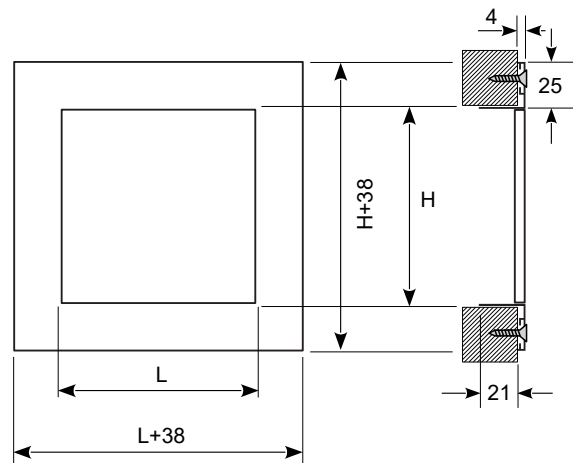

LxH - opening hole size

Grille neck size: (L-10) x (H-10)

Available sizes

Can be manufactured with custom sizes between:
LxH 150x150 mm ~ LxH 600x600 mm (opening size).

Mounting / Fixing



Fixing with visible screws (standard).



Fixing without visible screws.
(from the inside lateral wall of the frame)



Mounting with industrial contact adhesives
(Not supplied. Should be purchased by installer)

Accessories



Mini-latch system
(standard)



Magnetic lock - code **M**
(without extra cost)



Key lock - code **K**
(extra cost)