

# Silhouette® 100

## Axial Bathroom/ Toilet Fans



### Features & Benefits

- 17mm stylish ultra low profile grille
- Downstream airflow guide vanes for improved pressure development
- Designed for vertical or horizontal application
- Indication light (except B model)
- Fan IPX4 rated
- Suitable for wall, ceiling, panel and window mounting
- Meets current Building Regulations Approved Document F

### Slimline Bathroom Ventilation

With a slim profile of only 17mm, Silhouette blends in with the wall surface to provide an unobtrusive installation. Silhouette has a FID performance of 21 l/s. Silhouette can be ceiling/panel mounted and connected to an appropriate duct run to the outside.



17mm actual profile

### Models

#### Silhouette 100B

Single speed 100mm bathroom/toilet fan with indication light and back draught shutter.

Stock Ref

**454055**

#### Silhouette 100T

(Timer)

Single speed 100mm bathroom/toilet fan with integral adjustable electronic overrun timer (5-30 minutes), indication light and back draught shutter.

Stock Ref

**454056**

#### Silhouette 100H

(Humidity)

Single speed 100mm bathroom/toilet fan with integral adjustable auto humidity sensor from 60-90% RH, indication light and back draught shutter.

Stock Ref

**454057**

#### Silhouette 100TM

(PIR/Timer)

Single speed 100mm bathroom/toilet fan. Integral PIR operated model, (presence detector) with adjustable electronic overrun timer (5-30 minutes) indication light and back draught shutter.

Stock Ref


**454058**

### Dimensions (mm)


A	BØ	C	D	E	F
160	100	80	97	200	32

Weight 0.6kg

### Panel

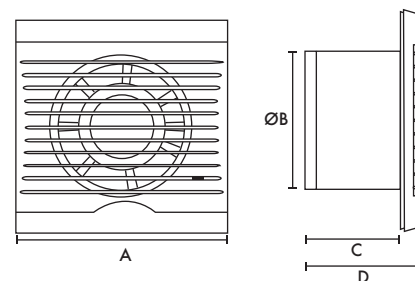

### Wall

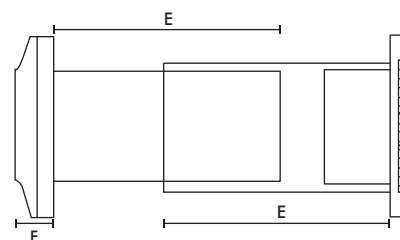

Fixing hole diameter 117mmØ

### Wall Kit

Stock Ref

**254102 (White)**

**254100 (Brown)**

### Window kit

Stock ref

**442947**

### Performance

Model	Extract Performance - FID			Sound dB(A) @ 3m
	m³/h	l/s	Watts	
Silhouette 100B/T/H/TM	75	21	14	38