


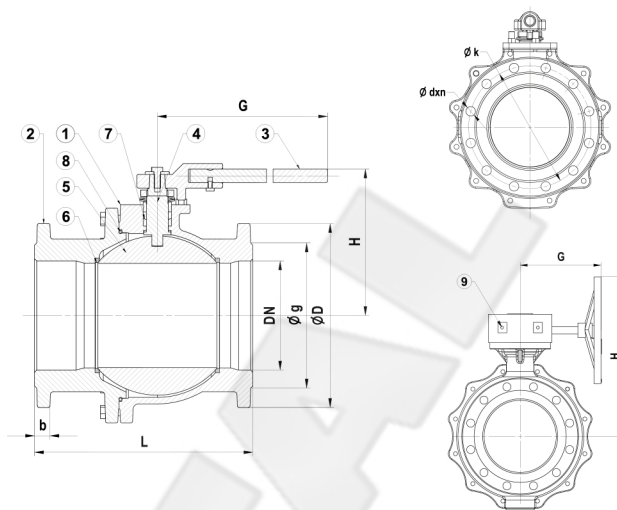

DN 250-300

Specificatii generale:

Temperatura de lucru: -10° - 120° (16 Bar)

Standard calitate: Certificare CE, TS EN 12266-1

Domeniu de aplicare:

Sisteme de apa calda si rece, aer comprimat, fluide non-acide si neinflamabile

Specificatii material	Nr	Denumire	Material
	1	Corp	GG 25 - EN GJL 250 - FONTA TURNATA GGG 40 - EN GJS 400 - 15 - FONTA DUCTILA
	2	Flanse	GG 25 - EN GJL 250 - FONTA TURNATA GGG 40 - EN GJS 400 - 15 - FONTA DUCTILA
	3	Maneta/Levier	OTEL ST37
	4	Tija	INOX AISI420
	5	Bila	OTEL INOX
	6	Garnituri	PTFE - TEFLON
	7	Pachet etansare	PTFE - TEFLON
	8	O-Ring	EPDM
	9	Reductor	GG 25 - EN GJL 250 - FONTA TURNATA

Dimensiuni	PRESIUNE NOMINALA	16 Bar					
	DIAMETRU NOMINAL	DN	125	150	200	*250	**300
	DIMENSIUNI ROBINET	L	325	350	400	450	500
		G	335	700		280	
		H	190	250	280	555	
		D	250	285	340	405	460
		k	210	240	295	355	410
		g	184	211	266	319	370
		b	26		30	32	
		dxn	19x8	23x8	23x12	28x12	
	GREUTATE ROBINET	Kg	32.6	72.6	84.2	187.4	196

* DN 300 ALEZAJ REDUS

** DN 250 SI DN 300 CU REDUCTOR