


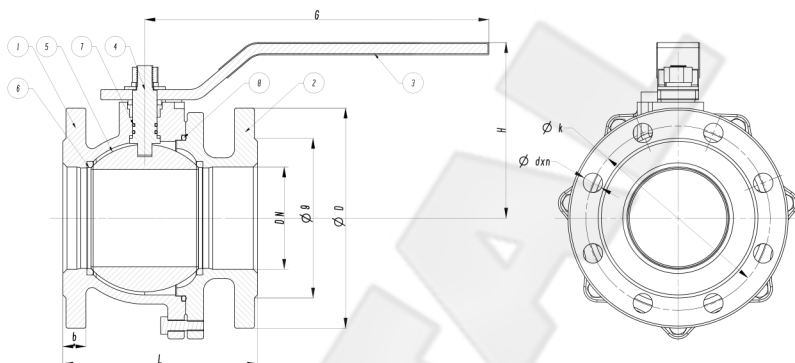

Specificatii generale:

Temperatura de lucru: -10° - 120° (16 Bar)

Standard calitate: Certificare CE, TS EN 12266-1

Domeniu de aplicare:

Sisteme de apa calda si rece, aer comprimat, fluide non-acide si neinflamabile

Specificatii material	Nr	Denumire componenta	Material
	1	Corp	GG 25 - EN GJL 250 - FONTA TURNATA GGG 40 - EN GJS 400 - 15 - FONTA DUCTILA
	2	Flanse	GG 25 - EN GJL 250 - FONTA TURNATA GGG 40 - EN GJS 400 - 15 - FONTA DUCTILA
	3	Maneta/Levier	OTEL ST37
	4	Tija	INOX AISI420
	5	Bila	OTEL INOX
	6	Garnituri	PTFE - TEFLON
	7	O-Ring	EPDM

Dimensiuni	PRESIUNE NOMINALA DIAMETRU NOMINAL	16 Bar												
	DN	15	20	25	32	40	50	65	80	100	125	150	200	
	DIMENSIUNI ROBINET	L	115	120	125	130	140	150	170	180	190	200	210	230
		G	155			190		260		335			555	700
		H	105			110	120	130	140	155	170	240	260	290
		D	95	105	115	140	150	165	185	200	220	250	285	340
		k	65	75	85	100	110	125	145	160	180	210	240	295
		g	46	56	65	76	84	99	118	132	156	184	211	266
		b	14	16		18		20		22	24	26		30
	dxn	14x4			19x4				19x8			23x8	23x12	
GREUTATE ROBINET	kg	2.5	3	3.5	5.6	6.6	8.8	12	15.5	20.8	29	51	78	