


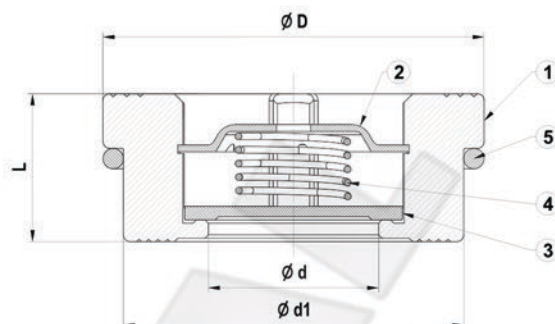

Specificatii generale:

Temperatura de lucru: -10° ...+120° (16 Bar)

Standard calitate: Certificare CE, TS EN 12266-1

Domeniu de aplicare:

Sisteme de apa calda si rece, fluide non-acide si neinflamabile, aer comprimat, sisteme de carburanti lichizi

Specificatii material	Nr	Denumire	Material
	1	Corp	CuZn40Pb2 - CW617N - Alama
	2	Ghidaj disc	OTEL INOX AISI304
	3	Disc	OTEL INOX AISI304
	4	Arc	OTEL INOX AISI302
	5	Arc de montaj	OTEL INOX AISI302

Dimensiuni	PRESIUNE NOMINALA DIAMETRU NOMINAL	16 Bar								
	DN	15	20	25	32	40	50	65	80	100
	Ød	15	20	25	31.5	39	48	64	74	89
	L	16	19	22	28	31.5	40	46	50	60
	D	40	47	56	72	82	95	115	132	152
	Ød1	36	44	51	67	78	90	108	126	146
GREUTATE ROBINET	Kg	0.094	0.134	0.202	0.458	0.620	0.976	1,360	2,078	3,030

Presiune minima de operare (mBar)	DIAMETRU NOMINAL	DN	15	20	25	32	40	50	65	80	100
	SENS CURGERE	CU ARC	21								
		CU ARC	17	18.3	16.3	16.2	16.1	15	13.7	12.5	
		FARA ARC	23	24	25	26	26.5				
		FARA ARC	2.6	3.9	4	4.2	5.1	5.6	7.4		