


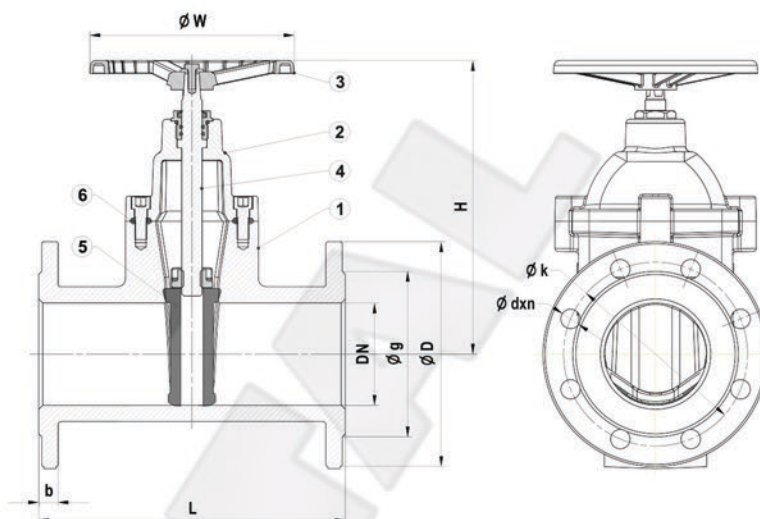

Specificatii generale:

Temperatura de lucru: -10° - 110° (16 Bar)

Standard calitate: Certificare CE, TS EN 12266-1

Domeniu de aplicare:

Sisteme de apa calda si rece, fluide non-acide si neinflamabile

Specificatii material	Nr	Denumire	Material
	1	Corp	GG 25 - EN GJL 250 - FONTA TURNATA GGG 40 - EN GJS 400 - 15 - FONTA DUCTILA
	2	Capac	GG 25 - EN GJL 250 - FONTA TURNATA GGG 40 - EN GJS 400 - 15 - FONTA DUCTILA
	3	Roata de manevra	GG 25 - EN GJL 250 - FONTA TURNATA
	4	Tija	OTEL INOX AISI420
	5	Sertar	GGG 40 - EN GJS 400 - FONTA DUCTILA CAUCIUCATA
	6	Garnituri	EPDM - NBR

Dimensiuni	PRESIUNE NOMINALA DIAMETRU NOMINAL	16 Bar														
	DN	40	50	65	80	100	125	150	200	250	300	350	400	500	600	
	DIMENSIUNI ROBINET	L	240	250	270	280	300	325	350	400	450	500	550	600	700	800
		H	170	180	230	245	265	355	400	490	615	700	835	910	1135	1300
		W	160				200	250			315			400		500
		D	150	165	185	200	220	250	285	340	405	460	520	580	715	840
		k	110	125	145	160	180	210	240	295	355	410	470	525	650	770
		g	84	99	118	132	156	184	211	266	319	370	429	480	609	720
		b	18	20		22	24	26		30	32		36	38	42	48
		dxn	19x4			19x8			23x8		23X12	28x12		28x16	31x16	34x20
	GREUTATE ROBINET	Kg	12	13	20	22	30	48	59	104	160	216	293	377	598	884