




# OTS 536

Tested according to EN 1154

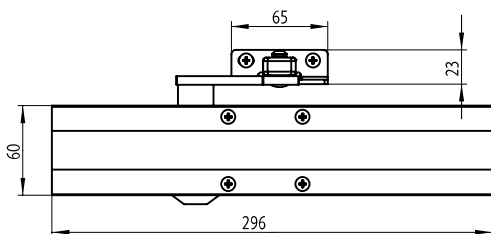

without mounting plate

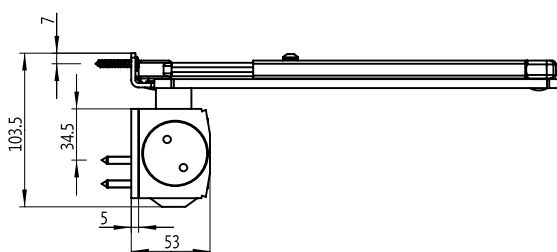

with mounting plate

## Product features

- Steplessly and laterally adjustable closing force sizes EN 2 – 6
- Valve functions which can be steplessly adjusted from the front:
  - closing speed <sup>[4]</sup>
  - latching speed
  - backcheck
- Thermomatic valve ensures that it continues to operate in the event of temperature fluctuations
- Safety valve in the closer protects against overload
- Max. door opening and closing angle 180° <sup>[1]</sup>
- Controlled closing from every opening angle
- Compact, state-of-the-art aluminium housing
- Optional: adjustable hold-open arm for door openings of 70° – 150° <sup>[3]</sup>
- Optional: extended arm for reveal depths up to 149 mm
- Optional: OTS 536 SV (with delayed closing action)



10 0432-BPR-0067

EN 1154: 1996 + A1: 2002

4	8	6	1	1	3
		2			