


Backdraught damper

CAR

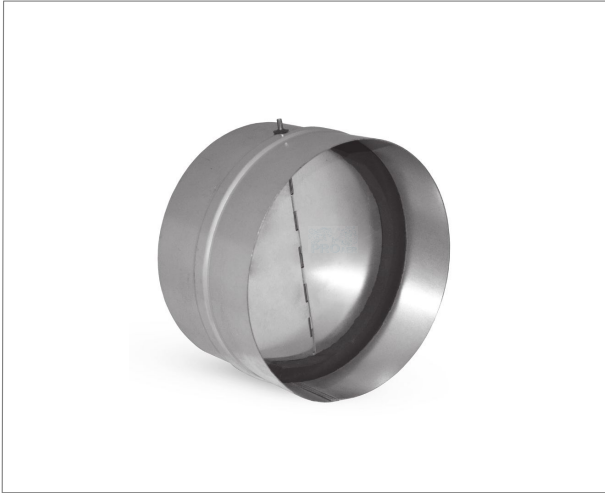

Description


Backdraught damper without sealing gasket.
With aluminium butterfly blades and closing with steel spring.
Internal seal between blades and casing.

Order code: **CAR** **Ød₁**

Product code _____

diameter Ød₁ _____

Dimensions

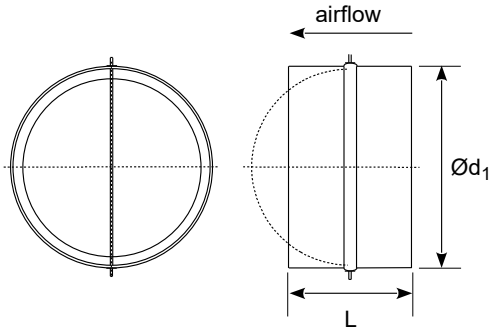

Ød ₁	L	Q _{max} (m ³ /h)
100	80	450
125	80	700
150	80	1000
160	80	1100
200	80	1500
250	190	2250
300	190	2600
315	190	2750
355*	285	3500
400*	285	4300
450*	285	5400
500*	285	6700
560*	285	8500
630*	285	10500

* with internal reinforcing rods

Note: mounting should be made with pivoting axe in vertical position and with airflow direction as marked on casing.