


TE15L TRANSPALET ELECTRIC, CAPACITATE 1500KG, ACUMULATOR LITHIU-ION



Specificatii

Model		TE15L
Actionare		electrica
Capacitate	Q(kg)	1500
Centru masa (incarcare)	c(mm)	500
Ampatament	Y(mm)	1295
Roata directoare	mm	160*70
Roti furci	mm	80*70 / 74*70
Inaltime ridicare	h3(mm)	195
Inaltimea furcilor coborate	h13(mm)	85 / 75
Lungime totala	l1	1660
Latime peste furci	b1(mm)	520 / 550 / 680mm
Lungime furci	s/e/l(mm)	53/160/1150
Raza intoarcere	Wa(mm)	1465
Viteza deplasare, inc/desc	Km/h	3.5/4.0
Panta max, inc/desc	%	3 / 10
Frana		Electromagnetic
Motor deplasare	w	600
Motor ridicare	w	800
Acumulator Li-Ion		24V/20Ah
Incarcator acumulator		24V/10A
Controller		LiftMaster

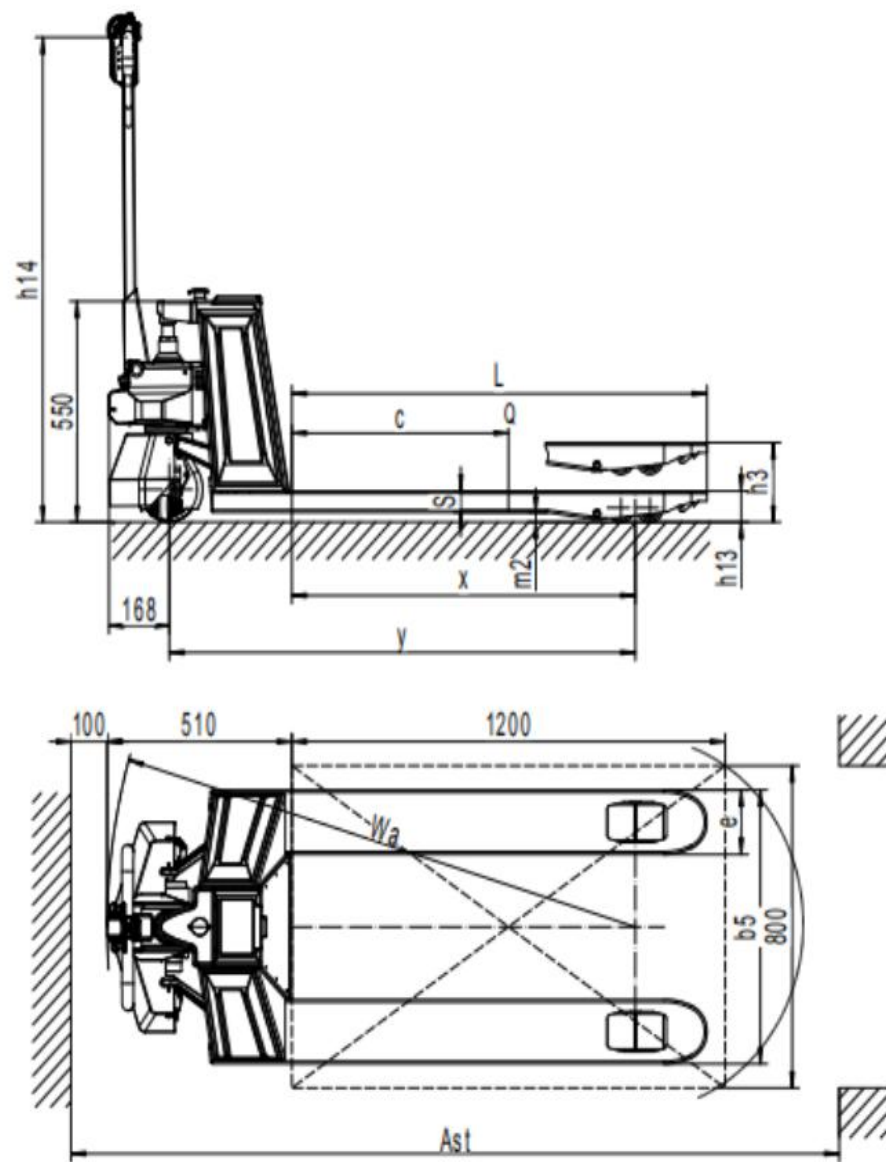

Aceasta functie permite si deplasarea cu maneta in pozitie verticala, pentru operare in lifturi, culoare inguste sau in interiorul camioanelor/containerelor.


Viteza "testoasa"

Indicator baterie

Coborare manuala

Martor LED


Necesita incarcare, daca LED aprins rosu

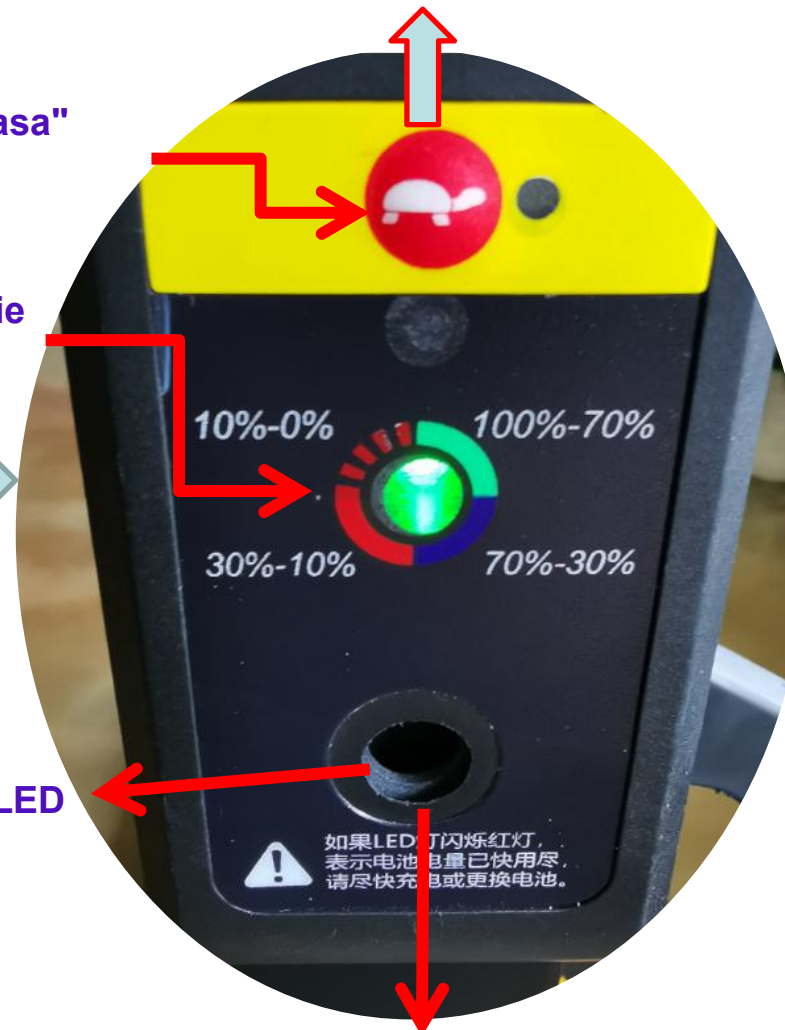




Buton ridicare

Deplasare

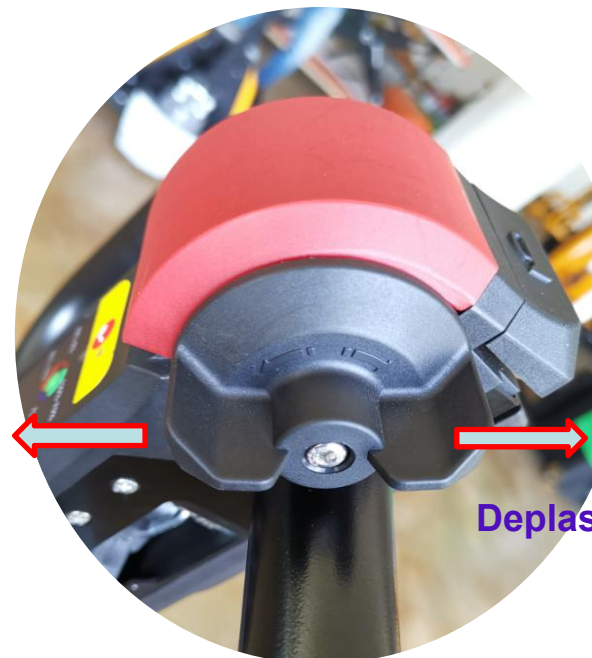

Deplasare

Claxon

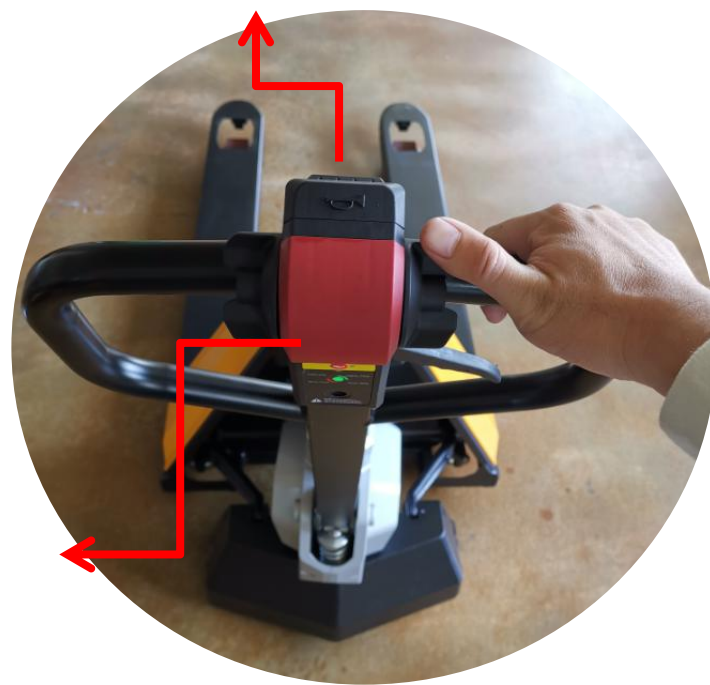

Belly Button

Acumulator Li-Ion




Acumulator Li-Ion

Capac protectie





Oprire de urgenta

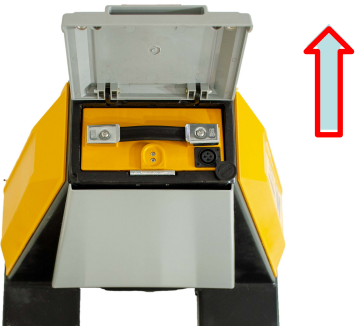



Incarcare

Timp de incarcare - 2 ore

Timp de lucru - 4-5 ore

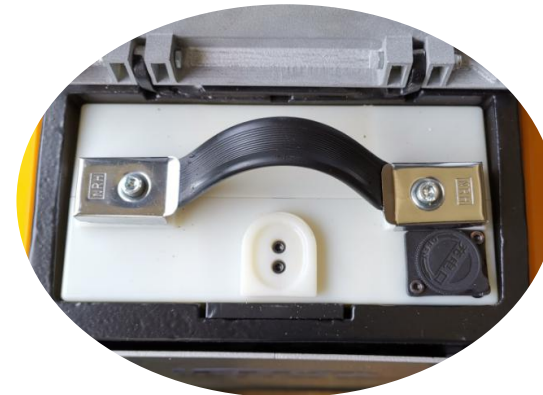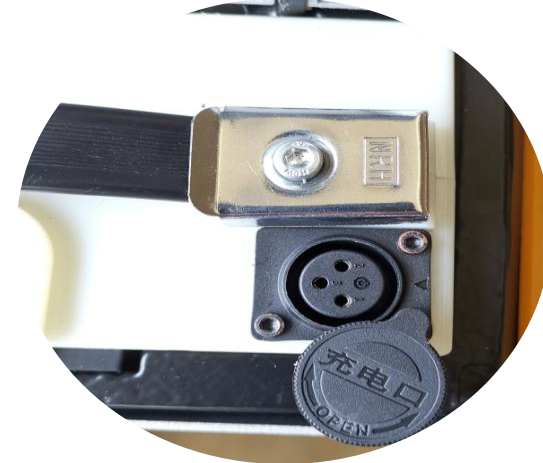

Roata balans

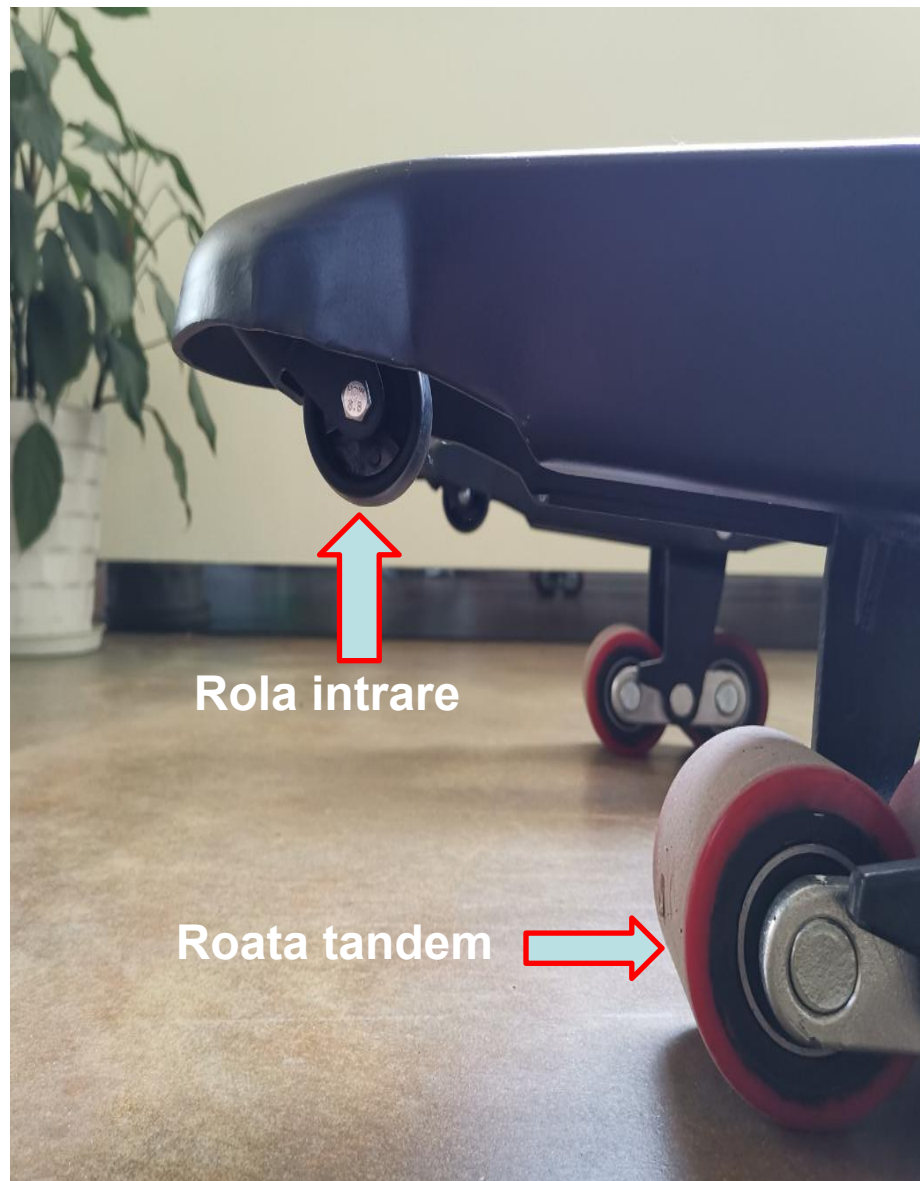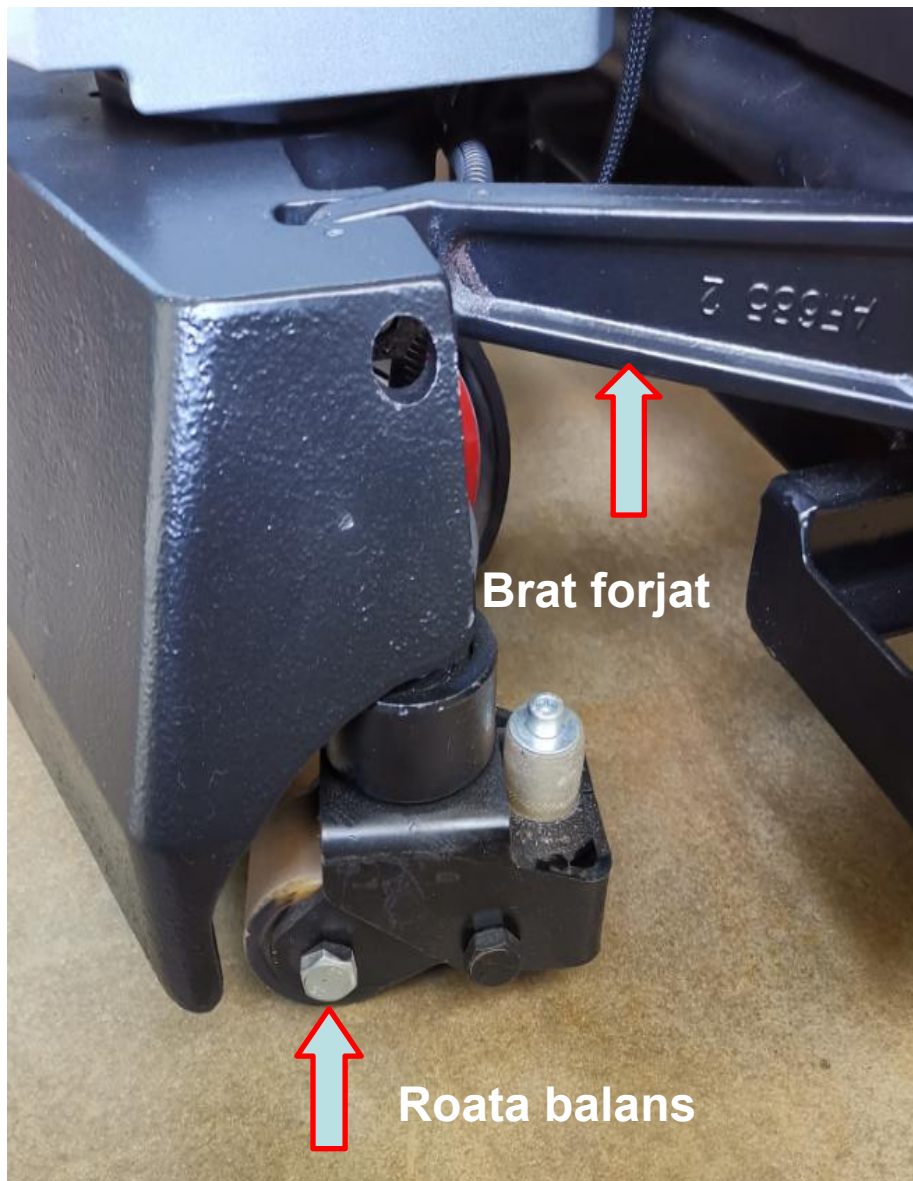

Avantaje

- ***Capacitate:1500KG***
- ***Acumulator Li-Ion***
- ***Inlocuirea rapida a acumulatorului***
- ***Role balans lateral***
- ***Role intrare***
- ***Performanta ridicata***
- ***Intretinere usoara***
- ***Raza intoarcere mica***
- ***Design compact si ergonomic***
- ***Incarcare facila si rapida***
- ***buton pentru viteza redusa***
- ***Comenzi smart***
- ***Structura solida a sasiului***