

Monocrystalline 60 cells

# VENUS



5BB



9BB



Guaranteed positive output selection 0 ~ +5 Wp by single measuring



3.2 mm anti-reflective glass



Maximum stability through aluminium soft grip frame



Maximum 5400 Pa snow load




SILVER | WHITE



BLACK | WHITE

✓ 15 years manufacturer's warranty  
25 years linear performance guarantee

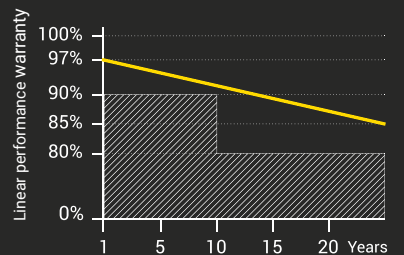

## OUTPUT: 310 - 340 WATT

VENUS high efficiency monocrystalline 60 cell modules with PERC cells, grants high performance and conversion efficiency over 20 %. VENUS series features a 35 mm silver or black anodized aluminium frame, which combines robustness to light weight and a 3.2 mm anti-reflective glass which is optimizing the panel performance to solar irradiance.



power for a better world

STC	A-M310/60 [5BB]	A-M320/60 [5BB]	A-M330/60 [5BB]	A-M340/60 [9BB]
Maximum Power (Pmax) (W)	310	320	330	340
Open Circuit Voltage (Voc) (V)	39.85	40.43	41.05	41.66
Short Circuit Current (Isc) (A)	10.07	10.19	10.33	10.48
Voltage at Maximum Power (Vmpp) (V)	32.58	33.13	33.67	34.20
Current at Maximum Power (Impp) (A)	9.56	9.66	9.80	9.94
Module Efficiency (%)	18.77	19.38	19.98	20.58

STC (Standard Testing Condition): Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25 °C, Spectra at AM 1.5; Test uncertainty tolerance for Pmax, Voc and Isc: ±3 %

Electrical Parameters at NOCT	A-M310/60 [5BB]	A-M320/60 [5BB]	A-M330/60 [5BB]	A-M340/60 [9BB]
Maximum Power (Pmax) (W)	229	237	245	253
Open Circuit Voltage (Voc) (V)	37.28	38.15	39.01	40.29
Short Circuit Current (Isc) (A)	7.94	8.02	8.10	8.18
Voltage at Maximum Power (Vmpp) (V)	30.57	31.31	32.03	32.76
Current at Maximum Power (Impp) (A)	7.49	7.57	7.65	7.73


NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m<sup>2</sup>, Ambient Temperature 20 °C, Spectra at AM 1.5, Wind at 1 m/s

Temperature Characteristics	
Pmax Temperature Coefficients (W / °C)	-0.36 % / °C
Voc Temperature Coefficients (V / °C)	-0.29 % / °C
Isc Temperature Coefficients (A / °C)	+0.05 % / °C
NMOT Nominal Operating Cell Temperature (°C)	45 ±2 °C

Operating Conditions	
Operating Module Temperature	-40 °C ~ +85 °C
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	20 A
Selection	0 ~ +5 W
Nominal Front Load	5400 Pa tested 8000 Pa
Nominal Rear Load	2400 Pa
Class of Protection	II

Specifications	
Cell Type	Mono G1 158.75 5BB   9BB
Weight	17.5 kg ±3 %
Dimensions	1658x996x35 mm (±2 mm)
Cable Cross Section Size	4 mm <sup>2</sup> , cable approx 110 cm, QC4 compatible
No. of cells	60 (6x10)
Junction Box	IP67, 3 diodes
Frame	Silver anodized aluminium Black anodized aluminium
Front glass	3.2 mm high transmission, low iron, tempered glass

Packing Details	
Container Type	40'HC
No. of Pallets	28
Pieces per Pallet	30
Total quantity of modules	840

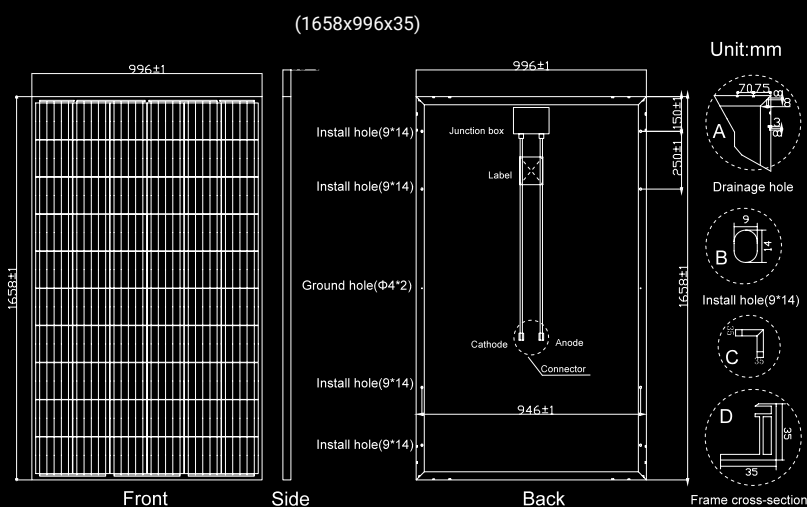

I-V Curve: (A-M320)

