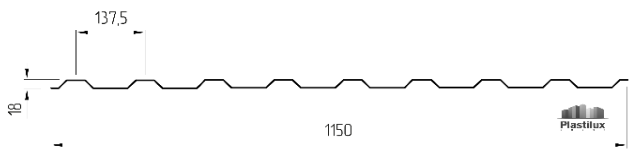


## FISA TEHNICA

Placi profilate din policarbonat compact.

Parametrii de baza	Policarbonat trapezoidal monolitic rezistent la grindina		
Denumire	ROYALPLAST	POLYNEX	SUNNEX
Categorie	PREMIUM	INDUSTRIAL	STANDARD
Durata de viata, ani	30	25	20
Grosime foii, mm	1	0.9	0.8
Forma trapezoidală			
Dimensiunile foii, mm		1150*2000, 1150*3000	1150*2000
Suprapunere laterala, %	3.04		
Dimensiuni profil, mm	37*69*18		
Inaltimea profilului, mm	18		
Lungime de unda, mm	137.5		
Metoda de aplicare a protectiei UV	Co extrudare pe partea superioara a foii		
Grosimea stratului de protectie, micrometri	50	40	30
Concentratie de protectie UV, %	50	30	5
Rezistenta la impact, kJ/mp	60		
Durabilitate Rockwell HR (M)	75		
Temperatura de functionare, C	-50 +120		
Temperatura de deformare, C	130		
Expansiune termica mm/m	<4		
Conductivitate termica, W/m*k	0.21		
Raza min de indoire, mm	>4000		
Absortia apei, %	0.4		