


QUA-016, rev.: 00

**ADAPTADOR DOMÉSTICO-INDUSTRIAL IP20 / DOMESTIC-INDUSTRIAL IP20**

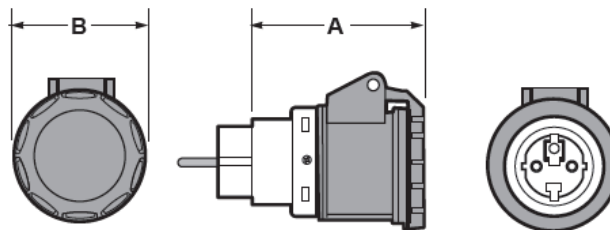

	A	B
Dimensions	80	60
Entrada / Entry	Clavija/plug schuko 16A/250V	
Salida / Outlet	Toma/socket ind. CEE 16A/250V-2P+T 6h	
Weight (g)	164	

<b>GRADO DE PROTECCIÓN</b> <i>DEGREE OF PROTECTION SET</i>	<b>IP20</b>
<b>RESISTENCIA AL IMPACTO</b> <i>IMPACT RESISTANCE</i>	<b>IK07</b>
<b>RESISTENCIA HILO INCANDESCENTE</b> <i>RESISTANCE WIRE GLOW</i>	<b>Soporte partes activas / Live parts support : 750°C</b> <b>Otras partes / Other parts: 650 °C</b>
<b>RESISTENCIA A LA TEMPERATURA POR PRE- SIÓN DE BOLA.</b> <i>TEMPERATURE RESISTANCE BALL PRES- SURE</i>	<b>Soporte partes activas / Live parts support : 125°C</b> <b>Otras partes / Other parts: 70 °C</b>
<b>CARACTERÍSTICAS CONSTRUCTIVAS.</b> <i>STRUCTURAL CHARACTERISTICS.</i>	<b>Entradas / Inlets: Clavija / Plug Schuko 16A/250V 2P+TTL</b> <b>Salida / Outlet Base / Socket Industrial use 16A/250V 2P+T</b> <b>Peso / Weight: 164g</b>
<b>NORMAS APLICADAS /</b> <i>APPLIED STANDARD</i>	<b>UNE 20315-1-1; UNE 20315-1-2 (IEC 60884-1)</b> <b>IEC 60309-1, IEC 60309-2</b>