

#LINKER

LINKABLE installation

5-year warranty

VANDAL PROOF

130lm W

* IES



220-240V- 50/60Hz

180°

IP65

IK08

POLY CARBONATE COVER

Ra ≥80

66SMD 2835



100,000h L70B50

PF ≥0,95

ON OFF 50,000

A+

MAX +45°C -25°C

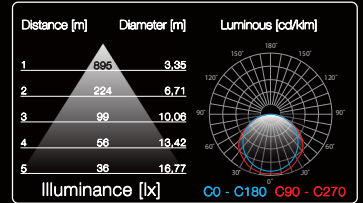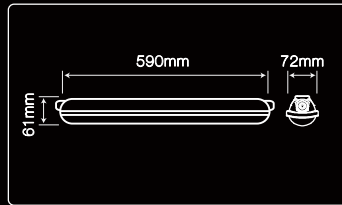

CCT	Luminous flux	Power	Efficacy	Product code
4000K	2730lm	21W	130lm/W	470690

#LINKER


LINKABLE installation

5-year warranty

VANDAL PROOF

130lm W

* IES



220-240V- 50/60Hz

180°

IP65

IK08

POLY CARBONATE COVER

Ra ≥80

126SMD 2835



100,000h L70B50

PF ≥0,95

ON OFF 50,000

A+

MAX +45°C -25°C

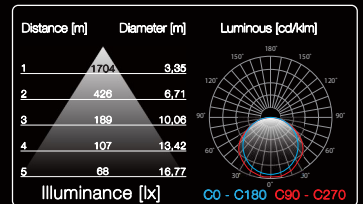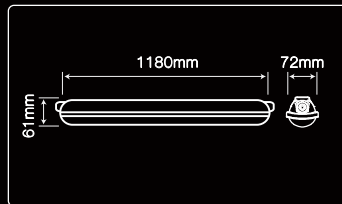

CCT	Luminous flux	Power	Efficacy	Product code
4000K	5070lm	39W	130lm/W	470706

#LINKER

LINKABLE installation

5-year warranty

VANDAL PROOF

130lm W

* IES



220-240V- 50/60Hz

180°

IP65

IK08

POLY CARBONATE COVER

Ra ≥80

188SMD 2835



100,000h L70B50

PF ≥0,95

ON OFF 50,000

A+

MAX +45°C -25°C

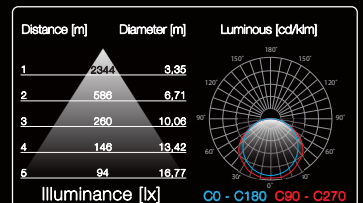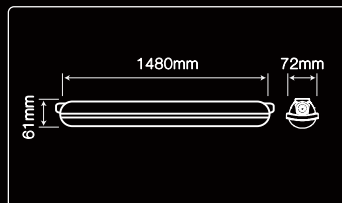

CCT	Luminous flux	Power	Efficacy	Product code
4000K	7150lm	55W	130lm/W	470713