

VALUE Flex 1500

LED modules for semi-professional applications



Areas of application

- Hospitality
- Signage
- Architecture lighting
- Cove lighting
- General illumination
- Wall integration
- Display cabinet lighting

Product benefits

- Energy saving low-power flexible LED strip
- Pre-wired LED strip, simple and quick plug-and-play installation
- Good light output due to homogeneous LED distance and high color consistency
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Easy installation with optional track system
- Easy to cut and reconnect to the reliable SLIMCONNECT system

Product features

- Available with light color: Warm White, Cool White
- Luminous flux: up to 1600 lm/m
- High color consistency: 4 SDCM
- Self-cooling
- Beam angle per module: 120°
- Dimmable with suitable OPTOTRONIC control gears
- Type of protection: IP20



Product family datasheet

Technical data

Electrical data

Product description	Nominal voltage	Type of current	Nominal wattage per meter	Rated wattage	Input voltage range	Reverse Voltage
VF1500 -G3-827-05 ¹⁾	24.0 V	DC	11.5 W	57.50 W	23...25 V	25 V
VF1500 -G3-830-05 ¹⁾	24.0 V	DC	11.5 W	57.50 W	23...25 V	25 V
VF1500 -G3-840-05 ¹⁾	24.0 V	DC	11.5 W	57.50 W	23...25 V	25 V
VF1500 -G3-865-05 ¹⁾	24.0 V	DC	11.5 W	57.50 W	23...25 V	25 V

¹⁾ See product remark

Photometrical data

Product description	Light color LED	Color temperature	Color rendering index Ra	Luminous flux per meter	Luminous efficacy	Light color (designation)
VF1500 -G3-827-05 ¹⁾	White	2700 K	>80	1445 lm	126 lm/W	White
VF1500 -G3-830-05 ¹⁾	White	3000 K	>80	1520 lm	132 lm/W	White
VF1500 -G3-840-05 ¹⁾	White	4000 K	>80	1600 lm	139 lm/W	White
VF1500 -G3-865-05 ¹⁾	White	6500 K	>80	1600 lm	139 lm/W	White

¹⁾ See product remark

Light technical data

Product description	LED pitch	Beam angle
VF1500 -G3-827-05 ¹⁾	14.28 mm	120 °
VF1500 -G3-830-05 ¹⁾	14.28 mm	120 °
VF1500 -G3-840-05 ¹⁾	14.28 mm	120 °
VF1500 -G3-865-05 ¹⁾	14.28 mm	120 °

¹⁾ See product remark

LED module information

Product description	Number of LEDs per meter
VF1500 -G3-827-05 ¹⁾	70
VF1500 -G3-830-05 ¹⁾	70
VF1500 -G3-840-05 ¹⁾	70
VF1500 -G3-865-05 ¹⁾	70

¹⁾ See product remark


Dimensions & weight

Product description	Length	Length – smallest unit	Width	Height	Cable length
VF1500 -G3-827-05 ¹⁾	5000 mm	100.0 mm	8.0 mm	1.5 mm	500.0 mm
VF1500 -G3-830-05 ¹⁾	5000 mm	100.0 mm	8.0 mm	1.5 mm	500.0 mm
VF1500 -G3-840-05 ¹⁾	5000 mm	100.0 mm	8.0 mm	1.5 mm	500.0 mm
VF1500 -G3-865-05 ¹⁾	5000 mm	100.0 mm	8.0 mm	1.5 mm	500.0 mm

Product description	Product weight
VF1500 -G3-827-05 ¹⁾	90.00 g
VF1500 -G3-830-05 ¹⁾	90.00 g
VF1500 -G3-840-05 ¹⁾	90.00 g
VF1500 -G3-865-05 ¹⁾	90.00 g

¹⁾ See product remark

Product line drawing

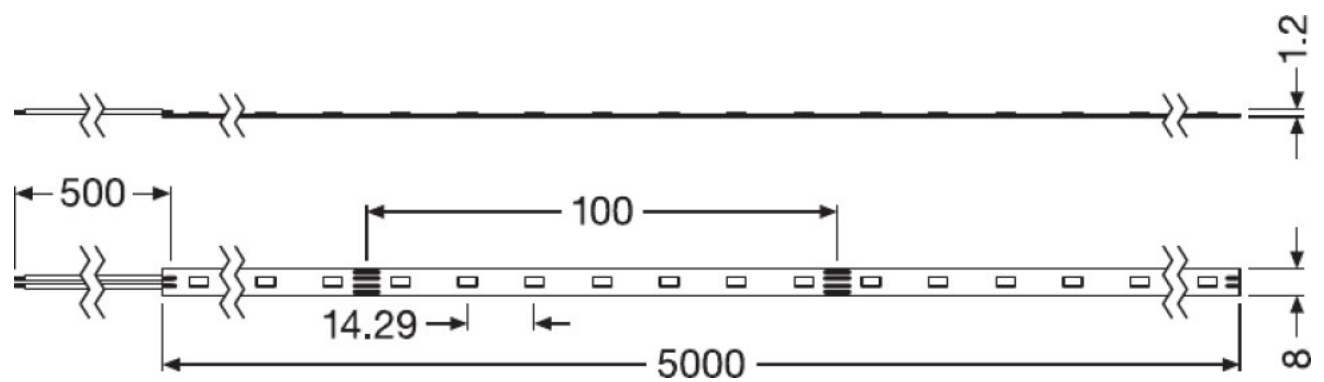

VF1500 -G3-827-05, VF1500 -G3-830-05, VF1500 -G3-840-05, VF1500 -G3-865-05

Temperatures & operating conditions

Product description	Performance temp. acc. to IEC 62717	Temperature range in operation at Tc point	Ambient temperature range
VF1500 -G3-827-05 ¹⁾	40 °C	-25...75 °C ²⁾	-25...+55 °C ³⁾
VF1500 -G3-830-05 ¹⁾	40 °C	-25...75 °C ²⁾	-25...+55 °C ³⁾
VF1500 -G3-840-05 ¹⁾	40 °C	-25...75 °C ²⁾	-25...+55 °C ³⁾
VF1500 -G3-865-05 ¹⁾	40 °C	-25...75 °C ²⁾	-25...+55 °C ³⁾

¹⁾ See product remark

²⁾ Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

³⁾ Rated ambient temp. 25°C/Providing that temperature at Tc point is below max value during operation/Temperature ramping for environmental testing acc. to IEC 62717, 1K/min

Lifespan

Product description	Rated lamp life time	Nominal lamp life time
VF1500 -G3-827-05 ¹⁾	35000 h	35000 h
VF1500 -G3-830-05 ¹⁾	35000 h	35000 h
VF1500 -G3-840-05 ¹⁾	35000 h	35000 h
VF1500 -G3-865-05 ¹⁾	35000 h	35000 h

¹⁾ See product remark

Capabilities

Product description	Dimmable	Lowest bending radius	Self-adhesive
VF1500 -G3-827-05 ¹⁾	Yes	50 mm	Yes
VF1500 -G3-830-05 ¹⁾	Yes	50 mm	Yes
VF1500 -G3-840-05 ¹⁾	Yes	50 mm	Yes
VF1500 -G3-865-05 ¹⁾	Yes	50 mm	Yes

Product description	With connection set	With end piece
VF1500 -G3-827-05 ¹⁾	Yes	Yes
VF1500 -G3-830-05 ¹⁾	Yes	Yes
VF1500 -G3-840-05 ¹⁾	Yes	Yes
VF1500 -G3-865-05 ¹⁾	Yes	Yes

¹⁾ See product remark

Product family datasheet

Certificates & standards

Product description	Energy efficiency class	Energy consumption	Standards
VF1500 -G3-827-05 ¹⁾	A+ ²⁾	13 kWh/1000h	CE/Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547
VF1500 -G3-830-05 ¹⁾	A+ ²⁾	13 kWh/1000h	CE/Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547
VF1500 -G3-840-05 ¹⁾	A++ ²⁾	13 kWh/1000h	CE/Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547
VF1500 -G3-865-05 ¹⁾	A++ ²⁾	13 kWh/1000h	CE/Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547

Product description	Type of protection
VF1500 -G3-827-05 ¹⁾	IP20
VF1500 -G3-830-05 ¹⁾	IP20
VF1500 -G3-840-05 ¹⁾	IP20
VF1500 -G3-865-05 ¹⁾	IP20

¹⁾ See product remark

²⁾ Applicable on smallest operable unit

Logistical data

Product description	Temperature range at storage
VF1500 -G3-827-05 ¹⁾	-30...85 °C
VF1500 -G3-830-05 ¹⁾	-30...85 °C
VF1500 -G3-840-05 ¹⁾	-30...85 °C
VF1500 -G3-865-05 ¹⁾	-30...85 °C

¹⁾ See product remark

Product remark

Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

Equipment / Accessories

Product family datasheet

- SLIMCONNECT system FLEX IP54 connector
- Optional Track system
- ELEMENT LED drivers
- OPTOTRONIC LED drivers

Application advice

For more detailed application information and graphics please see product datasheet.

Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File	
	Certificates EAC Certificate
	Certificates Manufacturers Declaration for Value Flex Family
	Declarations of conformity EU Declaration of Conformity VF and VFP
	Eulumdat Eulumdat VF1500-G3-827-05
	Eulumdat Eulumdat VF1500-G3-830-05
	Eulumdat Eulumdat VF1500-G3-840-05
	Eulumdat Eulumdat VF1500-G3-865-05

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899526051	VF1500 -G3-827-05	Shipping carton box 10	250 mm x 235 mm x 293 mm	17.21 dm ³	2217.00 g
4052899526075	VF1500 -G3-830-05	Shipping carton box 10	250 mm x 235 mm x 293 mm	17.21 dm ³	2217.00 g
4052899526099	VF1500 -G3-840-05	Shipping carton box 10	250 mm x 235 mm x 293 mm	17.21 dm ³	2217.00 g
4052899526112	VF1500 -G3-865-05	Shipping carton box 10	250 mm x 235 mm x 293 mm	17.21 dm ³	2217.00 g

Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	------------------------------	--------------------------------------	--------	--------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.