

# POS-35-C series

35W Constant Voltage Low Profile Enclosed Switching Power Supply



## ■ Features:

- Constant voltage design
- Universal AC input range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection



## Ⓢ ELECTRICAL SPECIFICATION

MODEL	POS-35-5-C	POS-35-12-C	POS-35-24-C
<b>OUTPUT</b>			
Rated Voltage	5V	12V	24V
Voltage Adjustment	4.5 ÷ 5.5V	10.8 ÷ 13.2V	21.6 ÷ 26.4V
Rated Current	7A	3A	1.5A
Current Range	0 ÷ 7A	0 ÷ 3A	0 ÷ 1.5A
Rated Power	35W	36W	
Line Regulation	± 0.5%		
Load Regulation	± 0.5%		
Voltage Tolerance [3]	± 1%		
Ripple & Noise (max.) [2]	80mV <sub>p-p</sub>	120mV <sub>p-p</sub>	160mV <sub>p-p</sub>
Setup, Rise Time, at full load [4]	1000ms, 35ms / 230VAC at full load		
Hold up Time (typ.)	30ms / 230VAC at full load		
<b>INPUT</b>			
Voltage Range	90 ÷ 264VAC		
Frequency Range	47 ÷ 63Hz		
Efficiency (typ.)	82%	86%	88%
AC current (typ.)	0.7A/115VAC, 0.42A/230VAC		
Inrush current (max.)	45A / 230VAC		
<b>PROTECTIONS</b>			
Over Current	Range: 110 ÷ 150% Type: hiccup mode. Recovers automatically after fault condition is removed.		
Short Circuit	Type: hiccup mode. Recovers automatically after fault condition is removed.		
Over Voltage	Range: 120 ÷ 145% Type: shut down output voltage. Recovers automatically after fault condition is removed.		
<b>WORKING ENVIRONMENT</b>			
Working Temperature	-20°C ÷ +70°C		
Working Humidity	20 ÷ 90% RH non-condensing		
Storage Temperature and Humidity	-40°C ÷ +85°C, 10 ÷ 95% RH non-condensing		

# POS-35-C series

35W Constant Voltage Low Profile Enclosed Switching Power Supply



## SAFETY AND EMC REGULATIONS

<b>Safety Standards</b>	Compliance to EN60950-1
<b>Withstand Voltage</b>	IN/OUT: 1.5kVAC; IN/GND: 1.5kVAC; OUT/GND: 500VAC
<b>EMC Emission</b>	Compliance to EN55032, EN61000-3-2, EN61000-3-3
<b>EMC Immunity</b>	Compliance to EN55024


## OTHERS

<b>Dimensions</b>	99 x 82 x 30mm (L x W x H)
<b>Weight and packing</b>	0.2kg; 60pcs./ctn; ctn weight and dimensions: 12.4kg; 39.5 x 23.5 x 29cm

**EAN Code**

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.


## MECHANICAL SPECIFICATION

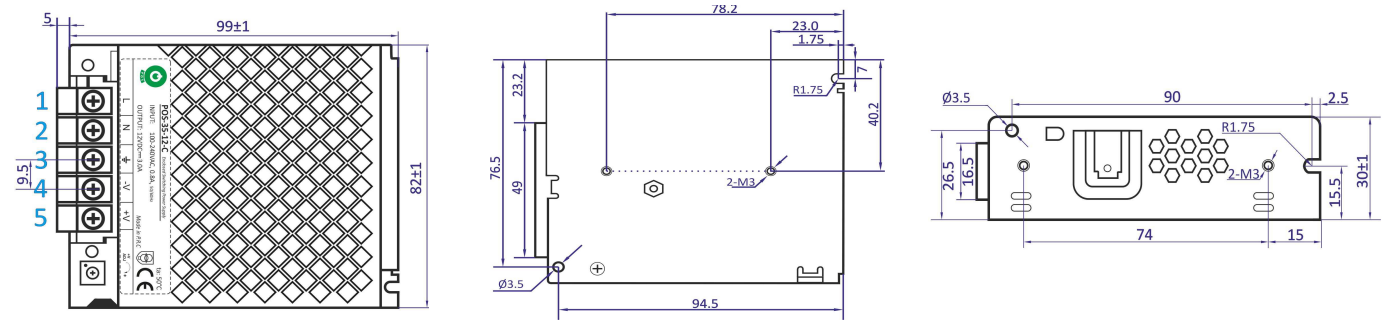

## PIN ASSIGNMENT

No.	Assignment	No.	Assignment
1	Input: AC/N	4	Output: U <sub>OUT</sub> -
2	Input: AC/L	5	Output: U <sub>OUT</sub> +
3	GND	SVR1	Output voltage adjustment

## DERATING CURVE

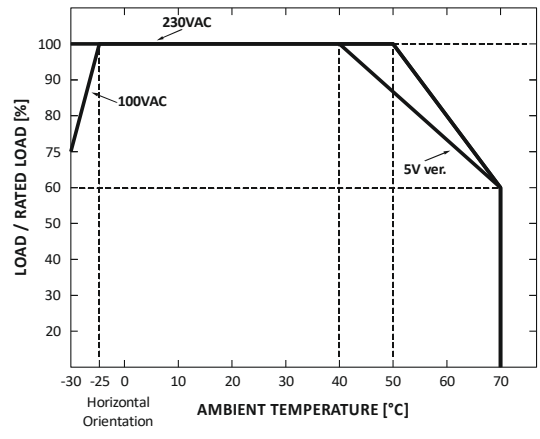

## STATIC CHARACTERISTIC

