




LED STREET LIGHTING FIXTURE

Product N°	Voltage	Power	Colour temperature	Luminous flux	Cat. N°
LUT2203045	220 V-240 V AC	30 W	4500 K	3200 lm	02318


- * FLICKERLESS
- * IK10
- * UV RESISTANT
- * NET WEIGHT: 1.25 kg

Body: AL
Diffuser: PC

TRIDONIC DRIVER	Ra ≥ 80 CRI	PF > 0,95 POWER FACTOR	240V 220V VOLTAGE
EVERLIGHT LED TYPE	IP65 IP RATE	OUTDOOR	50/60Hz FREQUENCY

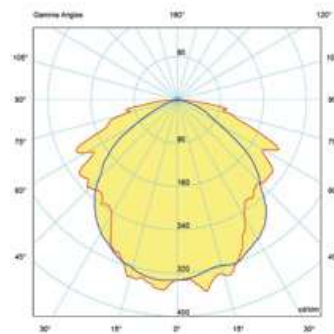

0°-180° 90°-270°

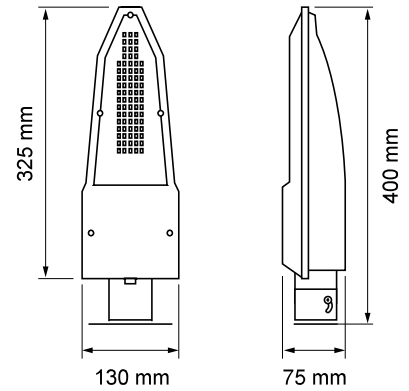


LED STREET LIGHTING FIXTURE

Product N°	Voltage	Power	Colour temperature	Luminous flux	Cat. N°
LUT2202045	220 V-240 V AC	20 W	4500 K	2000 lm	02319

- * FLICKERLESS
- * IK10
- * UV RESISTANT
- * NET WEIGHT: 1.25 kg

Body: AL
Diffuser: PC

OSRAM DRIVER	Ra ≥ 80 CRI	PF > 0,95 POWER FACTOR	240V 220V VOLTAGE
SAMSUNG LED TYPE	IP65 IP RATE	OUTDOOR	50/60Hz FREQUENCY



0°-180° 90°-270°

