

Declaration of performance: No. CPR-BG/0003

1. Unique identification code of the product-type: **KERASET**
2. Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11(4) of the CPR:

NORMAL CEMENTITIOUS ADHESIVE FOR CERAMIC TILES

3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer: **Internal and external tiling on floors and walls**
4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11(5): **MAPEI Bulgaria EOOD – Business Park Sofia, building 8A – Sofia (Bulgaria)** **www.mapei.bg**
5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2): **Not applicable**
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V: **System 3**
System 4 for reaction to fire
7. In case of the declaration of performance concerning a construction product covered by a harmonised standard:
The notified testing laboratory RESEARCH INSTITUTE OF BUILDING MATERIALS, No. 1950, performed the determination of the product-type on the basis of type testing on samples taken by the manufacturer, under system 3, and issued the test reports No. ПИТ-ЕС-269-3/11.06.2010 and No. 454/11.06.2010.
8. In the case the declaration of performance concerning a construction product for which a European Technical Assessment has been issued: **Not applicable**
9. Declared performance

Essential characteristics	Performance	Harmonized technical specification
Reaction to fire	Class A1 A1_{fl}	EN 12004:2007 + A1:2012
Bond strength as: - initial tensile adhesion strength	≥ 0,5 N/mm²	
Durability for: - tensile adhesion strength after heat ageing - tensile adhesion strength after water immersion - tensile adhesion strength after freeze-thaw cycles	≥ 0,5 N/mm² ≥ 0,5 N/mm² ≥ 0,5 N/mm²	
Release of dangerous substances	See SDS	

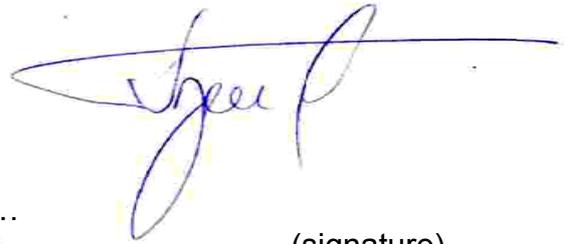
10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by: **Plamen Petrov – General Manager**
(name and function)

Sofia, 01/07/2013

.....
(place and date of issue)

A handwritten signature in blue ink, appearing to be 'Sofia', written over a horizontal line.

(signature)

CE MARKING according to CPR 305/2011 and EN12004:2007+A1:2012

 1950	 MAPEI Bulgaria EOOD Business Park Sofia, building 8A – 1766 Sofia www.mapei.bg																
<p style="text-align: center;"> 10 CPR-BG/0003 EN 12004:2007+A1:2012 KERASET Normal cementitious adhesive for internal and external tiling on floors and walls </p>																	
<table border="0"> <tr> <td>Reaction to fire</td> <td>Class A1 / A1_f</td> </tr> <tr> <td>Bond strength, as:</td> <td></td> </tr> <tr> <td> Initial tensile adhesion strength</td> <td>≥ 0,5 N/mm²</td> </tr> <tr> <td>Durability for:</td> <td></td> </tr> <tr> <td> Tensile adhesion after heat ageing</td> <td>≥ 0,5 N/mm²</td> </tr> <tr> <td> Tensile adhesion after water immersion</td> <td>≥ 0,5 N/mm²</td> </tr> <tr> <td> Tensile adhesion after freeze/thaw cycles</td> <td>≥ 0,5 N/mm²</td> </tr> <tr> <td>Release of dangerous substances</td> <td>see SDS</td> </tr> </table>		Reaction to fire	Class A1 / A1 _f	Bond strength, as:		Initial tensile adhesion strength	≥ 0,5 N/mm ²	Durability for:		Tensile adhesion after heat ageing	≥ 0,5 N/mm ²	Tensile adhesion after water immersion	≥ 0,5 N/mm ²	Tensile adhesion after freeze/thaw cycles	≥ 0,5 N/mm ²	Release of dangerous substances	see SDS
Reaction to fire	Class A1 / A1 _f																
Bond strength, as:																	
Initial tensile adhesion strength	≥ 0,5 N/mm ²																
Durability for:																	
Tensile adhesion after heat ageing	≥ 0,5 N/mm ²																
Tensile adhesion after water immersion	≥ 0,5 N/mm ²																
Tensile adhesion after freeze/thaw cycles	≥ 0,5 N/mm ²																
Release of dangerous substances	see SDS																