



## CENTRALISED HEAT RECOVERY UNIT

### APPLICATION

Whole-house heat recovery unit, suitable for ceiling or false-ceiling installation, for horizontal mounting.

### SPECIFICATION

**Outer fan casing** manufactured from powder coated galvanised sheet steel providing long lasting and robust construction. The unit is finished in white RAL 9010.

**Internal structure** manufactured from EPP (expanded polypropylene) providing reduced sound emissions and maximised air tightness and thermal insulation.

**EC external rotor motors** fitted as standard for energy saving. Provided with integral thermal protection, mounted on sealed for life ball bearings.

**Backward curved centrifugal impeller** dynamically balanced and directly driven by the motor to provide a smooth airflow through the unit.

Highly efficient **counterflow heat exchanger** to maximise thermal recovery.

### FEATURES & BENEFITS

**Ease of installation:** 243mm height (269mm max., including fixing brackets and drain connection) to overcome shallow ceiling voids.

**Simplified electric wiring:** the unit is supplied pre-cabled.

**G4 filters** easy removable for cleaning from the outside: no need to remove the access panel. External F7 filter cassette on request.

**Integral automatic bypass** for free cooling during the summer season.

**Automatic anti-frost protection** to prevent frost building up on the intake side of the heat exchanger.

**Two drainage** holes to meet climate requirement.

**Tested to the latest standards:** units are tested in the TÜV Rheinland accredited internal laboratory according to the operating document IEC OD 2048 (level CTF1) for the IEC 60335-1 and IEC 60335-2-80 Standards, meaning accurate, up to date information on electrical safety, performance and noise level that can be relied upon.

Designed and manufactured in accordance with EN60335-2-80 (Low Voltage Directive) and the EMC Directive (Electromagnetic Compatibility).

### OPERATION


The unit is supplied with a multi-function LCD display (CTRL-DSP) for automatic control and convenience, providing:

- 3 speed settings (adjustable).
- Boost option.
- Holiday mode.
- Night mode.
- Weekly timer.
- Bypass setting.
- Airflow balancing.
- Filter replacement and fan failure indicator.
- Working hour counter.
- Setting saving and loading.
- Suitable for remote ambient sensors (SEN-HY, SEN-PIR, SEN-CO<sub>2</sub>).
- ModBus interface.
- Connection to remote pre/post heating element.
- Connection to remote water coil for heating.



**CTRL-DSP**  
(supplied as standard)

## Example of a complete ventilation system

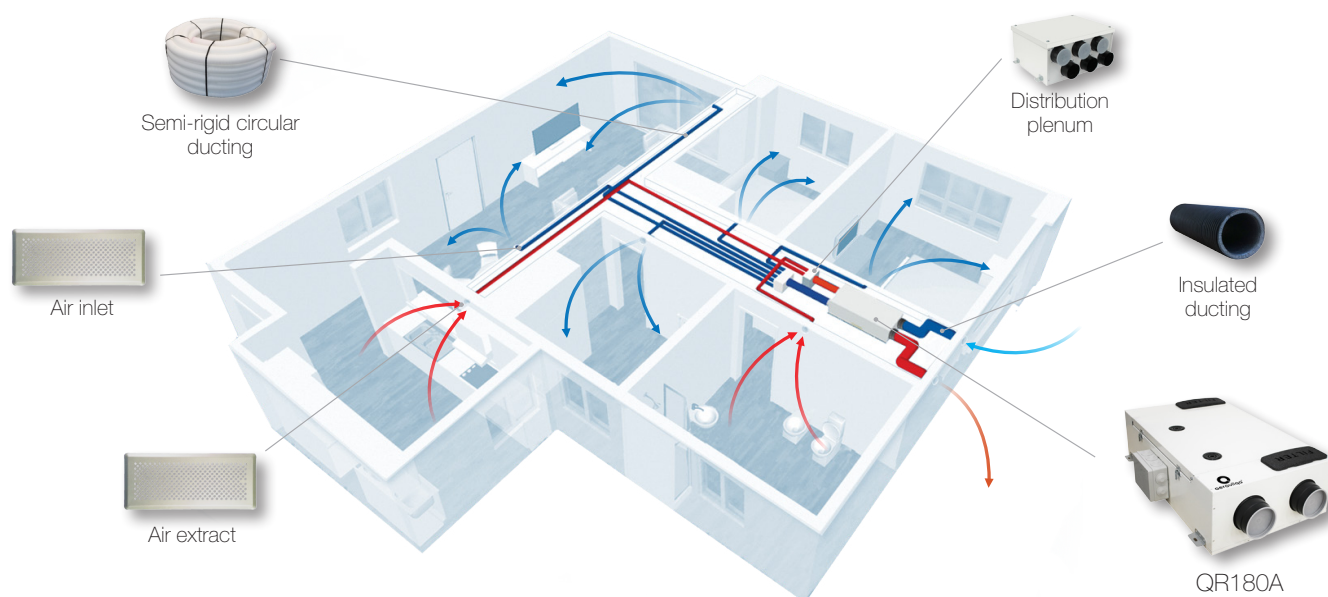



**Application:** new build.

**How it works:** a continuous running heat recovery unit (QR180A) transfers heat from humid air extracted from wet rooms to warm incoming fresh air which is ducted to habitable rooms. Thanks to the easy-to-fit air distribution system each single ambient can be properly ventilate: the boost function enables rapid extract of increased moisture or pollutant levels. It also provides discrete installation and very quiet operation.

**Energy saving:** the preheated/precooled fresh air and continuous air changes reduce the demand for additional heating/air-conditioning. The EC brushless motors significantly reduce the electricity consumption.

**Indoor Air Quality:** a correctly specified mechanical ventilation system can ensure the quality of the indoor air is constantly maintained for the health and well-being of the occupants as well as of the building. Duly maintained filters ensure that incoming air is suitably filtered of dust and pollen before it enters the home.

## Dimensions (mm) and Weight (kg)

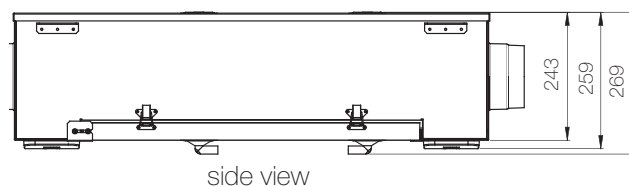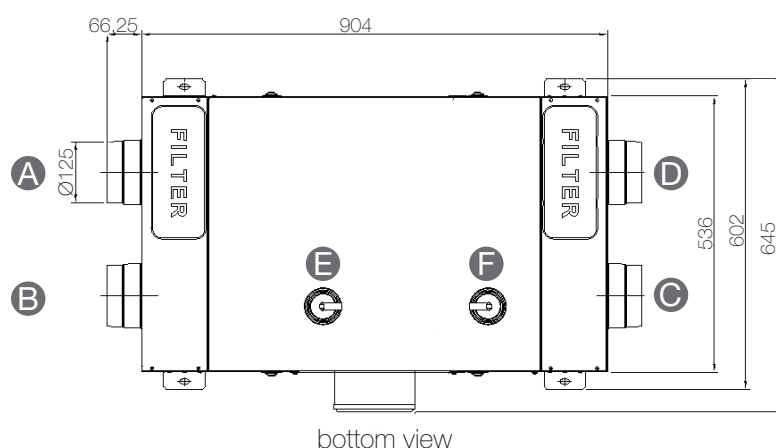

Model	QR180A
Weight	20
A	Intake air from outside
B	Exhaust air to outside
C	Supply air to inside
D	Extract air from inside
E	Winter condensation drainage
F	Summer condensation drainage

# QR180A

## Product fiche - ErP Directive, Regulations 1253/2014 - 1254/2014


a)	Mark	-	AERAULIQA		
b)	Model	-	QR180A		
c)	SEC class	-	A	A	B
c1)	SEC warm climates	kWh/m².a	-15	-10,6	-6,7
c2)	SEC average climates	kWh/m².a	-39,4	-34,3	-29,9
c3)	SEC cold climates	kWh/m².a	-77,3	-71,1	-65,9
	Energy label	-	Yes		
d)	Unit typology	-	Residential - bidirectional		
e)	Type of drive	-	Variable speed drive		
f)	Type of Heat Recovery System	-	Heat recovery		
g)	Thermal efficiency of heat recovery	%	82		
h)	Maximum flow rate @ 100 Pa	m³/h	177		
i)	Electric power input (maximum flow rate)	W	105		
j)	Sound power level (L <sub>WA</sub> )	dBA	50		
k)	Reference flow rate	m³/h	124		
l)	Reference pressure difference	Pa	50		
m)	Specific power input (SPI)	W/m³/h	0,412		
n1)	Control factor	-	0,65	0,85	1
n2)	Control typology	-	Local demand control	Central demand control	Manual control (no DCV)
o1)	Maximum internal leakage rate	%	2,5		
o2)	Maximum external leakage rate	%	1		
p1)	Internal mixing rate	%	N/A		
p2)	External mixing rate	%	N/A		
q)	Visual filter warning	-	Visual filter warning on display		
r)	Instructions to install regulated grilles	-	N/A		
s)	Internet address for pre/disassembly instructions	-	www.aerauliqua.com		
t)	Airflow sensitivity to pressure variations	%	N/A		
u)	Indoor/outdoor air tightness	m³/h	N/A		
v1)	AEC - Annual electricity consumption - warm climates	kWh	2,2	3,7	5,2
v2)	AEC - Annual electricity consumption - average climates	kWh	2,6	4,2	5,6
v3)	AEC - Annual electricity consumption - cold climates	kWh	8,0	9,6	11,0
w1)	AHS - Annual heating saved - warm climates	kWh	20,5	19,9	19,6
w2)	AHS - Annual heating saved - average climates	kWh	45,3	44,1	43,2
w3)	AHS - Annual heating saved - cold climates	kWh	88,5	86,3	84,6
	Sound pressure @ 3m <sup>(1)</sup>	°C	21		
	Ambient temperature max	°C	+40		
	Degree of protection IP	-	X4		
	Marking	-	CE		

- 220-240V ~ 50/60Hz.


- air performance measured according to ISO 5801 a 230V 50Hz, air density 1,2Kg/m³.

- data measured in the TÜV Rheinland accredited internal laboratory according to the operating document IEC OD 2048 (level CTF1) for the IEC 60335-1 and IEC 60335-2-80 Standards.

(1) sound pressure level @ 3m in free field, breakout, speed 40%, for comparative purposes only.

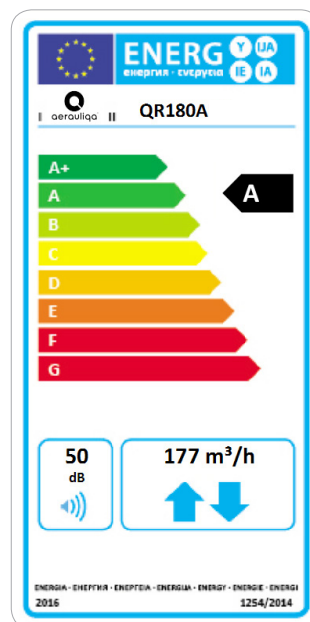

## Performance curve

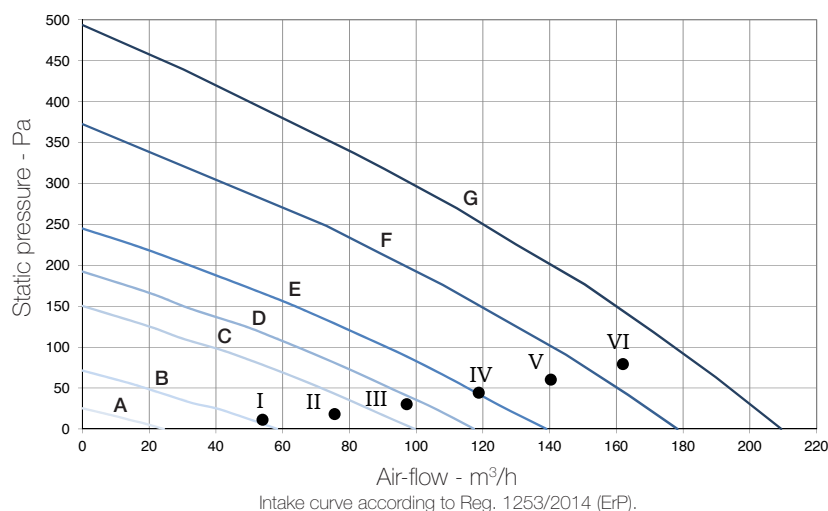

Curve	Speed %	W max	m³/h max
A (min)	20	10	24
B	35	15	58
C	53	28	100
D	60	36	117
E	70	47	139
F	85	77	178
G (max)	100	105	209

Working point	W	m³/h	SPI (W/m³/h)	ηt % <sup>(1)</sup>
I	15,2	54	0,281	88
II	23,7	76	0,313	86
III	32,8	97	0,337	84
IV	43,5	119	0,366	82
V	61,4	140	0,437	80
VI	81,3	162	0,502	79

(1) thermal efficiency of the unit.

## Sound level

Speed 100%	Lw dB - SOUND POWER OCTAVE BAND									Lp dB(A)
	63	125	250	500	1 K	2 K	4 K	8K	Tot	@3m
Intake	57	62	69	64	58	56	49	46	71	45
Supply	56	62	65	61	55	50	40	31	68	41
Extract	57	61	65	60	55	49	41	32	68	41
Exhaust	59	64	68	62	57	57	54	47	71	44
Breakout	56	61	64	59	58	50	40	35	68	41

Speed 80%	Lw dB - SOUND POWER OCTAVE BAND									Lp dB(A)
	63	125	250	500	1 K	2 K	4 K	8K	Tot	@3m
Intake	55	59	65	60	53	50	44	40	67	41
Supply	55	59	62	57	51	44	35	28	65	37
Extract	55	58	62	55	51	43	35	28	65	37
Exhaust	58	61	65	58	53	52	49	41	68	40
Breakout	55	58	60	55	53	45	35	28	64	37

Speed 60%	Lw dB - SOUND POWER OCTAVE BAND									Lp dB(A)
	63	125	250	500	1 K	2 K	4 K	8K	Tot	@3m
Intake	52	55	61	51	45	42	36	31	63	34
Supply	51	54	56	47	42	37	27	25	59	30
Extract	51	54	57	46	42	35	27	23	60	30
Exhaust	52	57	61	49	45	44	40	32	63	34
Breakout	51	54	55	45	44	37	29	24	59	29

Speed 40%	Lw dB - SOUND POWER OCTAVE BAND									Lp dB(A)
	63	125	250	500	1 K	2 K	4 K	8K	Tot	@3m
Intake	47	50	50	42	35	32	25	22	54	24
Supply	47	48	48	38	33	27	22	20	53	21
Extract	47	49	48	37	33	25	20	20	53	21
Exhaust	49	51	54	40	36	34	28	23	57	26
Breakout	47	48	46	37	34	30	22	19	52	21

Lp dB(A) @3m for comparative purposes only.